



Caledonian



Telephone Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

OUTDOOR TELEPHONE CABLES

Foam Skin Insulated and LAP Sheathed Air Core Cable
TP816A-02YS(L)2Y-StIII-Bd-600P08

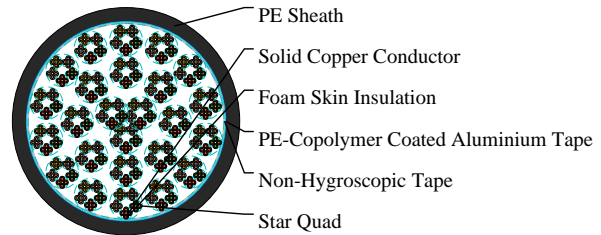

APPLICATIONS

The cables are designed for use as connection between central offices. The cables are suitable for installation in ducts, direct burial in the ground and also for aerial installation with integral suspension strand. Jelly filled option is for subscriber's cables installed underground or along the edge of pavement. An armoured option is offered for direct burial installations. A figure-8 self support option is offered for aerial installation.

STANDARDS

DIN VDE 0816

CABLE CONSTRUCTION

Conductors: Solid annealed bare copper as per class 1 of VDE 0295/IEC 60228.

Insulation: Foam Skin which is a composite polyethylene insulation made of an inner cellular layer and an outer solid skin 2Y11 type as per VDE 0207-2.

Twisted Pairs: Insulated conductors are twisted into pairs with varying lay length to minimize crosstalk.

Cabling Element: Star Quads.

Cable Core Assembly: 4 Cores are twisted into star quad. 5 star quads are stranded into a basic unit. 5 or 10 basic units each are stranded into one main unit. The star quads are grouped in units and stranded in layers to form the cable core. Standard make up is per VDE 0816 in the Cable Make Up Diagram.

Core Wrapping: One or more non-hygroscopic polyester tapes are helically or longitudinally laid with an overlap. These tapes furnish thermal, mechanical as well as high dielectric protection between shielding and individual conductors.

Moisture Barrier: A layer of aluminium tape (0.2mm) coated with PE-copolymer on one or both sides is applied longitudinally with overlap over the cable core to provide 100% electrical shielding coverage and ensures a barrier against water vapor.

Sheath: Black low or medium density polyethylene 2YM2 type as per VDE 0207-3, being able to withstand exposure to sunlight, temperature variations, ground chemicals and other environmental contaminants. Ripcord: Ripcord may be provided for slitting the sheath longitudinally to facilitate its removal.



Caledonian

Telephone Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Spare Pairs (optional): Spare pairs may be provided for large pair cables.

Continuity Wire (optional): Tinned copper drain wire may be longitudinally laid to ensure electrical continuity of the screen.

COLOUR CODE

Standard colour code is per VDE 0816 given in Colour Code Chart

PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +70°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 10 x Overall Diameter (unarmoured cables); 15 x Overall Diameter (armoured cables)

DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Pairs	AWG Size	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
			mm	mm	mm	mm	mm	kg/km
TP816A -02YS(L) 2Y-StIII- Bd-600P08	600	20	0.8	0.3	1.4	3.4	76	8090