



# Caledonian



Telephone Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## OUTDOOR TELEPHONE CABLES

Foam Skin Insulated and LAP Sheathed Jelly Filled Cable to RUS(REA) PE-89  
TP89-02YSF(L)2Y-100P04

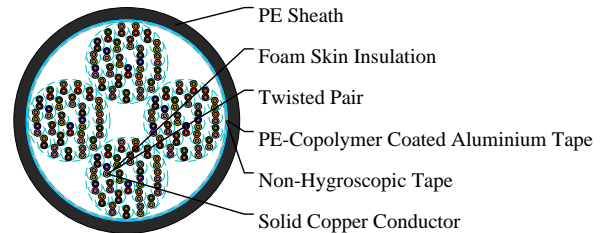

## APPLICATIONS

The cables are designed for use in access or trunk networks, from telephone exchange to subscriber area.

The cables are suitable for installation in ducts, direct burial in the ground and also for aerial installation with integral suspension strand. Jelly filled option is for subscriber's cables installed underground or along the edge of pavement. An armoured option is offered for direct burial installations where additional mechanical or rodent protection is required. A figure-8 self support option is offered for aerial installation.

## STANDARDS

RUS(REA) PE-89 (RUS 7 CFR 1755.890)

## CABLE CONSTRUCTION

**Conductors:** Solid annealed bare copper, as per ASTM B-3/class 1 of IEC 60228.

**Insulation:** Foam Skin which is a composite polyethylene insulation made of an inner cellular layer and an outer solid skin as per ASTM D 1248/IEC 60708.

**Twisted Pairs:** Insulated conductors are twisted into pairs with varying lay length to minimize crosstalk. Cabling Element: Twisted Pairs.

**Cable Core Assembly:** Cables of 25 pairs or less are assembled into cylindrical core. Cables larger than 25 pairs are assembled into units, which are then used to form the core. Units are identified by colour coded binders.

Standard construction is per RUS(REA) PE-89 given in Cable Make Up Diagram.

**Core Wrapping:** One or more non-hygroscopic polyester tapes are helically or longitudinally laid with an overlap. These tapes furnish thermal, mechanical as well as high dielectric protection between shielding and individual conductors.

**Moisture Barrier:** A corrugated copolymer coated aluminium tape (0.2mm/8mil) is applied directly over the cable core to provide 100% electrical shielding coverage and ensure a barrier against water vapor.

**Filling:** The cable core interstices are filled with petroleum jelly to avoid longitudinal water penetration within the cable. The water resistant filling compound is applied to the air space between non-hygroscopic tape and shield, shield and sheath within the cable core.

**Sheath:** Black low density polyethylene as per ASTM D 1248/IEC 60708, being able to withstand exposure to sunlight, temperature variations, ground chemicals and other environmental contaminants.

**Ripcord:** Ripcord may be provided for slitting the sheath longitudinally to facilitate its removal.



# Caledonian

Telephone Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

Spare Pairs (optional): Spare pairs may be incorporated for large pair cables.

Continuity Wire (optional): One tinned copper drain wire may be longitudinally laid to ensure electrical continuity of the screen.

## PHYSICAL AND THERMAL PROPERTIES

Temperature range during operation (fixed state): -30°C – +70°C

Temperature range during installation (mobile state): -20°C – +50°C

Minimum bending radius: 10 x Overall Diameter (unarmoured cables); 15 x Overall Diameter (armoured cables)

## DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Pairs	AWG Size	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation	Nominal Sheath Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Overall Diameter	Cable Weight	Cable Weight
			mm	mm	mm	in	mm	in	mm	Lbs./Kft	kg/km
TP89-02YSF (L)2Y-100P04	100	26	0.4	0.175	0.75	0.059	1.5	0.71	18	289	430