





Caledonian

Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

400Hz Airport Cables 4-core With Control Wires In The Center Cable 4C50+8C1

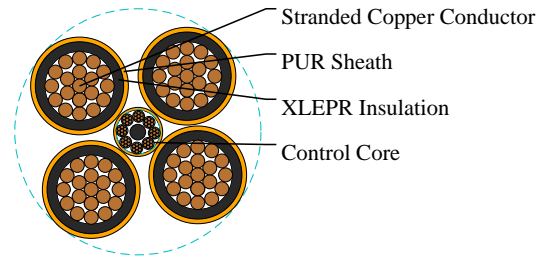

APPLICATIONS

These cables are designed for 400 Hz systems for power supply of aircraft, computer systems and radar stations, suitable for laying in earth, in water, outdoors, indoors and in cable ducts.

STANDARDS

VDE 0295

CABLE CONSTRUCTION

Conductor: Stranded copper conductor, Class5/Class 6 to VDE 0295/IEC 60228.

Insulation: XLEPR.

Control Core: 1mm² stranded copper conductor with polyolefin insulation.

Sheath: PUR.

PHYSICAL AND THERMAL PROPERTIES

Rated Voltage U₀/U (U_m):600V/1000V

Operating Temperatures:-40°C~+90°C

Minimum Bending Radius:static: 3×OD; dynamic: 4×OD

Halogen Free:Yes

No Corrosive & Toxic Gases:Yes

Flame Retardant:Yes

Abrasion Resistant:Yes

UV Resistant:Yes

Oil Resistant:Yes

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Diameter Of Core	Nom. Overall Diameter	Approx. Weight
No.×mm ²	mm	mm	kg/km
4×1×50+8×1	17.2	42	2643