





Caledonian

Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Airport Pavement Cable 600V 1C4

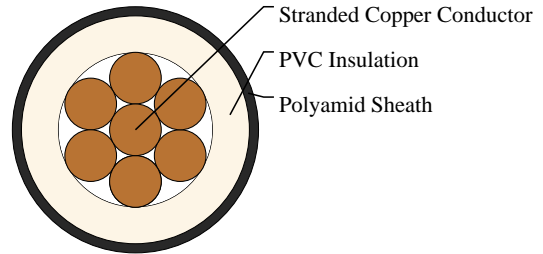

APPLICATIONS

These cables are used as airport pavement cable for secondary electrical circuits.

STANDARDS

FAA 150/5345-30

CABLE CONSTRUCTION

Conductor: Stranded copper conductor.

Insulation: PVC.

Sheath: Polyamid (nylon).

PHYSICAL AND THERMAL PROPERTIES

Rated Voltage U_0/U (Um):600V

Operating Temperatures:-45°C~+85°C

Minimum Bending Radius:5×OD

Abrasion Resistant:Yes

UV Resistant:Yes

Oil Resistant:Yes

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
No.×mm ²	mm	mm	mm	kg/km
1x4	0.6	0.15	4.1	48