





Caledonian

Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FAA L-824 Type B Shielded 5kV 1C6

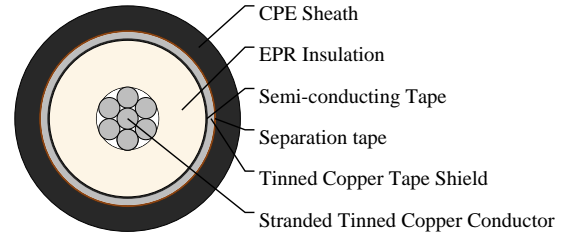

APPLICATIONS

These cables are used for interconnecting the transformers and the current regulator of airfield lighting systems in series circuits, suitable for fixed applications such as taxiways, runways, navigational aids, and obstruction lighting, can be installed in conduit and direct burial.

STANDARDS

FAA L-824 Type B

ICEA S-96-659/NEMA WC71

CABLE CONSTRUCTION

Conductor: Stranded tinned copper conductor.

Insulation: EPR.

Semi-Conductor: Helically applied semi-conducting tape.

Shield: Tinned copper tape.

Separator: Separation tape.

Sheath: CPE.

PHYSICAL AND THERMAL PROPERTIES

Rated Voltage $U_0/U (U_m)$:5kV

Maximum Conductor Temperature:90°C

Short Circuit Temperature:250°C

Operating Temperatures:-40°C~+85°C

Minimum Bending Radius:12×OD

Halogen Free:Yes

Abrasion Resistant:Yes

UV Resistant:Yes

Oil Resistant:Yes

DIMENSION AND PARAMETERS

No. of Cores × Cross-	No. of Strands	Nominal Insulation Thickness	Nominal Insulation Thickness	Nominal Sheath Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Overall Diameter	Approx. Weight	Approx. Weight
-----------------------	----------------	------------------------------	------------------------------	--------------------------	--------------------------	--------------------------	--------------------------	----------------	----------------



Caledonian

Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

sectional Area									
No. xmm ²		in	mm	in	mm	in	mm	kg/km	LBS/MFT
1x6	7	0.09	2.3	0.05	1.2	0.44	11.1	194	130