




# Caledonian

Airport Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## FAA L-824 Type B Unshielded 5kV 1C6AWG

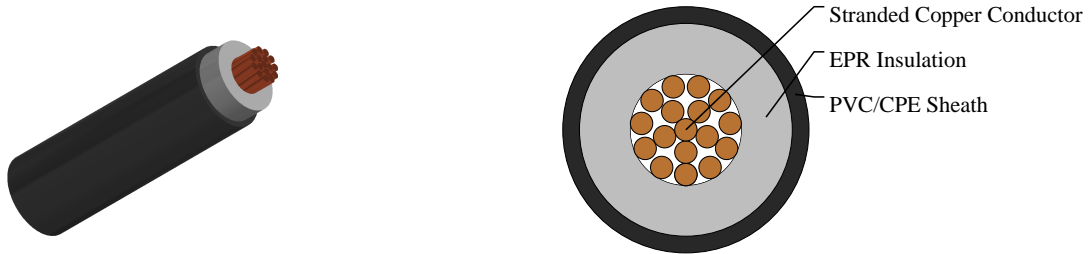

### APPLICATIONS

These cables are used for interconnecting the transformers and the current regulator of airfield lighting systems in series circuits, suitable for fixed applications such as taxiways, runways, navigational aids, and obstruction lighting, can be installed in conduit and direct burial.

### STANDARDS

FAA L-824 Type B

ICEA S-96-659/NEMA WC71

### CABLE CONSTRUCTION

Conductor: Stranded bare or tinned copper conductor.

Insulation: EPR.

Sheath: CPE/PVC.

### PHYSICAL AND THERMAL PROPERTIES

Rated Voltage  $U_0/U (U_m)$ :5kV

Maximum Conductor Temperature:90°C

Short Circuit Temperature:250°C

Operating Temperatures:-40°C~+85°C

Minimum Bending Radius:5×OD

Halogen Free:Yes

Abrasion Resistant:Yes

UV Resistant:Yes

Oil Resistant:Yes

### DIMENSION AND PARAMETERS

Cable Construction	No. of Strands	Nominal Insulation Thickness	Nominal Insulation Thickness	Nominal Sheath Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Overall Diameter	Approx. Weight	Approx. Weight
		in	mm	in	mm	in	mm	kg/km	LBS/MFT
1x6AWG	7/19	0.09	2.3	0.03	0.76	0.46	11.7	238	160