





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## AESSXF 1C2.5

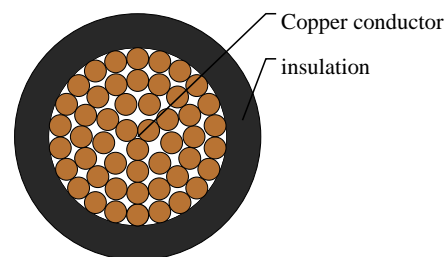

## APPLICATIONS

This XLPE insulated single-core cable is used in low voltage circuits in automobiles(vehicles and motorcycles)

## STANDARDS

JASO D611 ;ES SPEC

## CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: Cross-linked Polyethylene (XLPE)

Standard Compliance: JASO D611 ;ES SPEC

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -45 °C to +120 °C

Rated temperature: 120°C

Rated voltage up to 60V

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x2.5	50/0.26	2.1	0.4	2.9	3.0	28.5	7.6