





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

AV-V 1C5.0

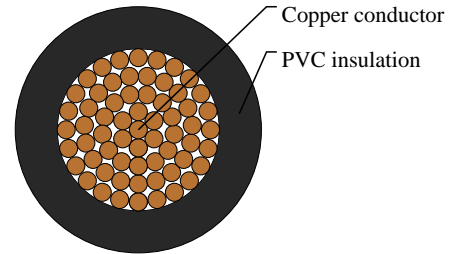

APPLICATIONS

This PVC insulated single-core cable is used in low voltage circuits in automobiles (Battery Cables).

STANDARDS

HMC ES 91110-05

CABLE CONSTRUCTION

Conductor: Annealed stranded copper

Insulation: Lead free PVC

Standard Compliance: HMC ES 91110-05

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to $+80^{\circ}\text{C}$

Rated temperature: 80°C

Rated voltage up to 60V

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No. × mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1x5	63/0.32	3.1	0.8	4.7	5.0	6.5	3.58