





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

AVSS 1C0.75f

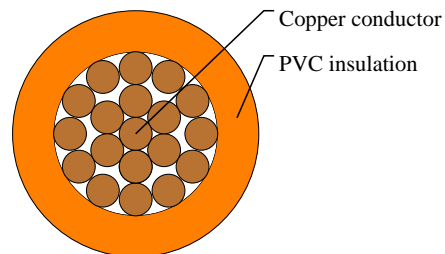

APPLICATIONS

This PVC insulated single-core cable is used for low voltage circuits in automobiles, vehicles and Motorcycles.

STANDARDS

JASO D611; ES SPEC

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare according to JIS 3120

Insulation: PVC

Standard Compliance: JASO D 611-94

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to $+85^{\circ}\text{C}$

Intermittent temperature: 120°C

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1×0.75	19/0.23	1.2	0.3	1.8	1.9	10	23.6