





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

AVSSH 1C0.3F

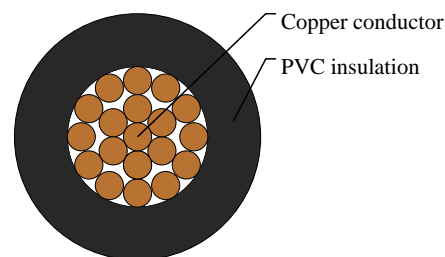

APPLICATIONS

This PVC insulated single-core cable is used for automobiles, vehicles and Motorcycles.

STANDARDS

JASO D 611-09 JASO D608

CABLE CONSTRUCTION

Conductor: Stranded ,bare copper

Insulation: PVC

Standard Compliance: JASO D 611-09 JASO D608

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to $+100^{\circ}\text{C}$

Rated voltage: 25VA and 60 VDC

DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Electrical Resistance at 20°C (max.)
No.×mm ²	no./mm	mm	mm	mm	mm	kg/km	MΩ/m
1×0.3F	19/0.16	0.8	0.3	1.4	1.5	5	48.6