





Caledonian

Automotive Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

FLRYWd

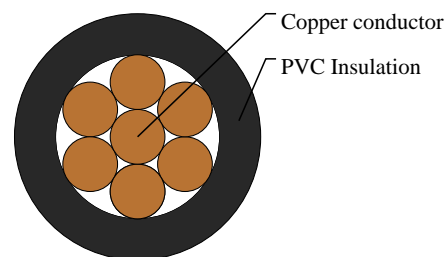

APPLICATIONS

This PVC insulated single-core cable is used for vehicle constructions.

STANDARDS

ISO 6722 Class B

CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN 13602

Insulation: PVC

PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to $+105^{\circ}\text{C}$

DIMENSION AND PARAMETERS

| No. of Cores × Cross- sectional Area | No. and Dia. of Wires | Diameter of Conductor (max.) | Nominal Insulation Thickness | Overall Diameter (min.) | Overall Diameter (max.) | Approx. Weight | Max. Conductor Resistance at 20 °C |
|---|--------------------------|------------------------------------|------------------------------------|-------------------------------|-------------------------------|-------------------|---|
| No.×mm ² | no./mm | mm | mm | mm | mm | kg/km | MΩ × km |
| 1×0.35 | 7/0.26 | 0.80 | 0.20 | 1.3 | 1.4 | 4.48 | 52 |