





# Caledonian

Automotive Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

FLRYWd

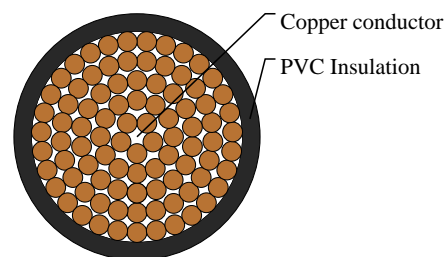

## APPLICATIONS

This PVC insulated single-core cable is used for vehicle constructions.

## STANDARDS

ISO 6722 Class B

## CABLE CONSTRUCTION

Conductor: Cu-ETP1 bare or tinned according to DIN EN 13602

Insulation: PVC

## PHYSICAL AND THERMAL PROPERTIES

Operating temperature: -40°C to +105°C

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	No. and Dia. of Wires	Diameter of Conductor (max.)	Nominal Insulation Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight	Max. Conductor Resistance at 20 °C
No.×mm <sup>2</sup>	no./mm	mm	mm	mm	mm	kg/km	MΩ × km
1×16.0	126/0.41	6.30	0.52	7.3	7.9	170	1.16