





Caledonian

Composite Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

1x RG59+3x1.5 Power Cable+2x1x2x24AWG Data Pairs Unarmoured LSZH Sheathed Composite Cable

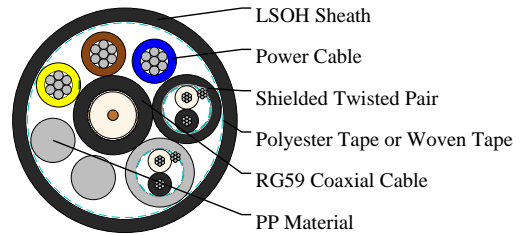

FIRE PERFORMANCE

Low Smoke Capacity	IEC61034-1/2
Halogen Free	IEC60754-1/2
Flame Propagation	IEC60332

CABLE CONSTRUCTION

1x75Ohm RG59 Coaxial Cable (in the center of the cable core)

Conductor: 0.58mm solid bare copper

Insulation: Polyethylene. Thickness 1.56mm

Shield: Braid of bare copper wire. Coverage $\geq 95\%$

Sheath: LSZH sheath. Nominal outer diameter 6.15mm

Sheath Color: Black

2x1x2x24AWG Shielded Twisted Pair (around coaxial cable)

Conductor: 7/0.2mm stranded tinned copper

Insulation: PVC material. Thickness 0.4mm

Insulation Color: White and black

Individual Shield: Aluminum polyester tape

Drain Wire: 24 AWG stranded tinned copper

Sheath: LSZH sheath. Thickness 0.76mm. Nominal outer diameter 4.8mm

Sheath Color: Black and Grey

3x1.5mm² Power Cable (around coaxial cable)

Conductor: 1.5mm² stranded tinned copper wire

Insulation: XLPE. Outer diameter 3mm

Insulation Color: Blue, Brown and Green/Yellow

Element Assembly

Filler: PE or PP material

Wrapping Tape: Polyester tape or woven tape



Caledonian

Composite Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Outer Sheath: LSZH, nominal outer diameter 16.0±1.0mm

Sheath Color :Black

PHYSICAL AND THERMAL PROPERTIES

Electrical and Physical Properties@20°C:

Coaxial Cable

Impedance: 75±3Ohm (@1MHz)

Max. Attenuation: 7.5dB/100m @50MHz

Power Cable

Electrical Resistance: 12.1Ohm/km

Insulation Resistance: ≥5500 MOhm \times km

Data Pairs

Electrical Resistance: 90Ohm/km

Insulation Resistance: ≥1000 MOhm \times km

Element Assembly

Min Bending Radius: 160mm

Operating Temperature: -35°C/+80°C