





Caledonian

Industrial Cables (Portuguese Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

FXZ1

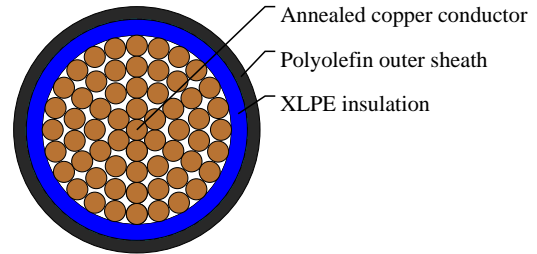

APPLICATIONS

These cables with zero halogen are high security cables. In case of fire, they do not emit toxic or corrosive gases, thereby protecting public health and avoiding any possible damage to electronic equipment. For this reason, its use is recommended in public places such as: hospitals, schools, museums, airports, bus terminals, shops in general, tunnels, the underground, etc., as well as in calculation centres, offices, production plants, laboratories, etc.

STANDARDS

IEC 60502-1

VOLTAGE RATING

600/1000 V

CABLE CONSTRUCTION

- Flexible electrolytic annealed copper conductor
- Class 5 in accordance with NP 2363
- XLPE insulation type DIX 3 according to HD603.
- LOSH polyolephine outer sheath

COLOUR CODE

Insulation Colour Code

Color coded to HD 308

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 3500 volts
- Minimum bending radius: $10 \times \varnothing$
- Working temperature: -15°C to $+90^{\circ} \text{C}$
- Short circuit temperature: $+250^{\circ} \text{C}$
- Insulation resistance: $1000 \text{ M}\Omega \times \text{km}$
- Halogen free: IEC 60754-1, EN 50267-2-1
- No corrosive gases: IEC 60754-2, EN 50267-2-2
- No toxic gases: NES 02-713, NF X 70-100



Caledonian

Industrial Cables (Portuguese Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

- Low smoke density: IEC 61034, EN 50268-2
- Flame retardant: IEC 60332-1, EN 50265-2-1
- Non-flame propagating: IEC 60332-3, EN 50266-2

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Approx. Overall Diameter	Approx. Weight
No. × mm ²	mm	kg/km
1x240	26.9	2283