




marketing@caledonian-cables.com



| Non-Cross-Section Area | Max. DC Resistance @20°C | Conduct AC Resistance @50Hz and 90°C | Inductive reactance @50Hz | Insulation Resistance @20°C | Conductance to screen capacitance | Max. dielectric stress | Charging current per phase | Dielectric loss per phase | Screen DC resistance at 20°C | Armour DC resistance at 20°C | Zero sequence resistance at 20°C | Zero seq. react. at 50Hz |
|------------------------|--------------------------|--------------------------------------|---------------------------|-----------------------------|-----------------------------------|------------------------|----------------------------|---------------------------|------------------------------|------------------------------|----------------------------------|--------------------------|
|------------------------|--------------------------|--------------------------------------|---------------------------|-----------------------------|-----------------------------------|------------------------|----------------------------|---------------------------|------------------------------|------------------------------|----------------------------------|--------------------------|

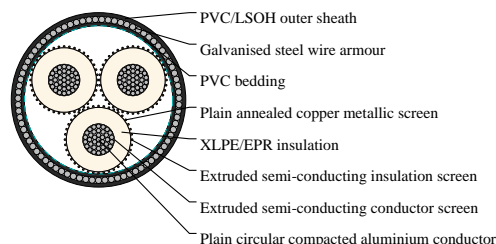

Caledonian

Industrial Cables (Australian Standard Medium Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

| mm ² | Ohm/ km | Ohm/ km | Ohm/M km | MegOhm.k | μF × km | kV × mm | A × km | W × km | Ohm/ km | Ohm/ km | Ohm/ km | Ohm/ km |
|-----------------|------------|------------|-------------|----------|------------|------------|--------|-----------|------------|------------|------------|------------|
| 150 | 0.206 | 0.264 | 0.12 | 13000 | 0.189 | 3.4 | 1.13 | 85.5 | 0.265 | 0.25 | 0.593 | 0.0731 |

DIMENSION AND PARAMETERS

| Nominal Cross- sectional Area | Conductor Diameter | Nominal Insulation Thickness | Nominal Diameter over Insulation | Nominal Dia. over Bedding | Screen Area on Each core | No. Diameter of Screened Wires | Nominal Armour Wire Diameter | Diameter under Armour | Nom. Diameter Over Screened Wires | Nom. Overall Diameter | Approx. Weight |
|----------------------------------------|-----------------------|------------------------------------|-------------------------------------------|------------------------------------|-----------------------------------|--------------------------------------------|---------------------------------------|-----------------------------|-----------------------------------------------|-----------------------------|-------------------|
| mm ² | mm | mm | mm | mm | mm ² | no x mm | mm | mm | mm | mm | kg/km |
| 150 | 14.2 | 8 | 31.7 | 80.9 | 68.1 | 40x0.85 | 3.15 | 87.2 | 35.2 | 95.2 | 1190 |