




# Caledonian

Industrial Cables (Australian Standard Medium Voltage)

www.caledonian-cables.com

marketing@caledonian-cables.com

## 3.8/6.6kV Three Core Individual Screened & PVC Sheathed (Al Conductor) Light Duty 3C300

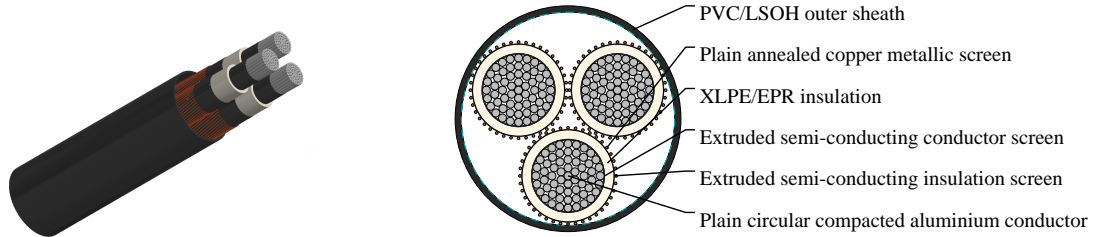

### APPLICATIONS

These cables are designed to be used for the supply of electrical energy in fixed applications up to the rated voltages at a nominal power frequency between 49Hz and 61Hz., they are suitable for use in distribution installation, electrical power station , they are applied for installation, outdoors, underground where subject to mechanical damage.

### STANDARDS

AS/NZS 1429.1

### VOLTAGE RATING

3.8/6.6kV

### CABLE CONSTRUCTION

CONDUCTOR: Plain circular compacted aluminium to AS/NZS1125

Maximum Continuous Operating Temperature: 90°C

CONDUCTOR SCREEN: Extruded semi-conducting compound, bonded to the insulation and applied in the same operation as the insulation

INSULATION: Cross Linked Polyethylene (XLPE) – standard  
Ethylene Propylene Rubber (EPR) – alternative

INSULATION SCREEN: Extruded semi-conducting compound

METALLIC SCREEN: Plain annealed copper wire: 3kA for nominal 1 second(LIGHT DUTY)

SHEATH: Black 5V-90 polyvinyl chloride (PVC) – standard

Orange 5V-90 PVC inner plus black high density polyethylene (HDPE) outer – alternative

Low smoke zero halogen (LSOH) – alternative

### TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Max. Conduct DC Resistance @20°C	Cond. AC Resistance @50Hz and 90°C	Inductive reactance @50Hz	Insulation Resistance @20°C	Conductor to screen capacitance	Max. dielectric stress	Current Ratings (Unenclosed In Air)	Current Ratings (Buried Direct)	Current Ratings (Buried In Ducts)
mm <sup>2</sup>	Ohm/km	Ohm/km	Ohm/km	MegOhm.km	µF × km	kV × mm	A	A	A
300	0.1	0.13	0.0885	4100	0.582	1.5	447	447	378



# Caledonian

Industrial Cables (Australian Standard Medium Voltage)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter over Insulation	Screen Area on Each core	Nom. Diameter Over Screened Wires	Nom. Overall Diameter	Approx. Weight
mm <sup>2</sup>	mm	mm	mm	mm <sup>2</sup>	mm	mm	kg/km
300	20.1	2.8	27	11.9	29	72.7	473