





# Caledonian

Industrial Cables (French Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H07V-K UL

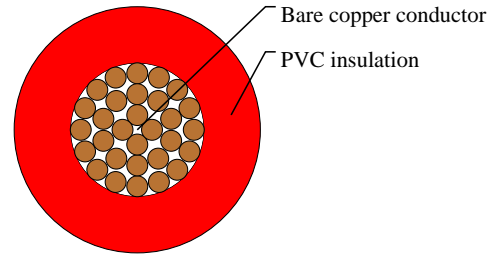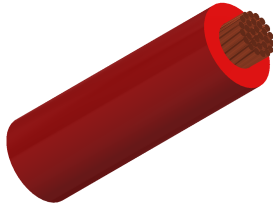

## APPLICATIONS

H07VK UL are internationally approved harmonized, UL/CSA and AWM/MTW approved PVC European flexible single-conductor wires. Can be found in appliance wiring and machine tool wiring as well as in control systems. They may also be used in pipes and flexible conduits. Recommended for the internal wiring of apparatus, switchboards and distributor boards in electronic and electrical equipment designed for international use in North American & European countries and for MRO replacement of international made equipment wire.

## STANDARDS

NF C 32-201-7, HD 21.7 S2, VDE-0281 Part-3  
UL-Standard and Approval 1063 MTW  
UL-AWM Style 1015  
CSA TEW  
CSA-AWM I A/B  
FT-1  
CE Low Voltage Directive 73/23/EEC and 93/68/EEC  
ROHS compliant

## VOLTAGE RATING

450/750V

## CABLE CONSTRUCTION

- Fine tinned copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5, HD383 Class-5
- Special PVC T13 core insulation
- Cores to VDE-0293 colors

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308/HD308/NF C 32-081

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

## PHYSICAL AND THERMAL PROPERTIES



# Caledonian

Industrial Cables (French Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Working voltage UL/CSA: 600v AC, 750v DC.
- Test voltage: 2500 volts
- Flexing/Static bending radius: 10-15 x Ø
- Temperature HAR/IEC: -40° to +70° C
- Temperature UL-AWM: -40° to +105° C
- Temperature UL-MTW: -40° C to +90° C
- Temperature CSA-TEW: -40° C to +105° C
- Flame retardant: NF C 32-070, FT-1
- Insulation resistance: 20 MΩ x km

## DIMENSION AND PARAMETERS

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No.×mm <sup>2</sup>		mm	mm	kg/km	kg/km
1 x 1.5	16(30/30)	0.7	3.1	14.4	20