




Caledonian

Industrial Cables (German Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

H05G-K

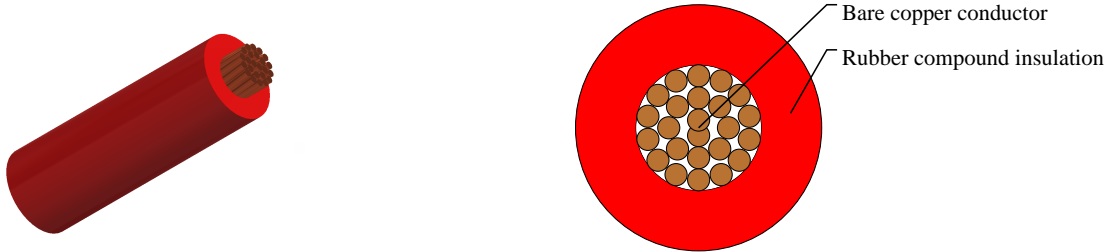

APPLICATIONS

These cables are recommended for the internal wiring of switchboards and distributor boards as well as in operating parts in or on lights. The higher temperature range allows for connections to heaters with an alternating nominal voltage of 1000V. or direct nominal voltage of 750V. These cables are all allowed for laying in tubes in and under plaster.

STANDARDS

HD 22.7 S2

VDE-0282 Part-7

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Rubber compound type EI3 (EVA) to DIN VDE 0282 part 7 insulation

COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000volts
- Flexing bending radius: $7 \times \varnothing$
- Static bending radius: $7 \times \varnothing$
- Flexing temperature: -25°C to $+110^{\circ} \text{C}$
- Static temperature: -40°C to $+110^{\circ} \text{C}$
- Short circuit Temperature: $+160^{\circ} \text{C}$
- Flame retardant: IEC 60332.1
- Insulation resistance: $10 \text{ M}\Omega \times \text{km}$

DIMENSION AND PARAMETERS



Caledonian

Industrial Cables (German Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

| No. of Cores × Cross- sectional Area | AWG Size | Nominal Insulation Thickness | Approx. Overall Diameter | Nominal Copper Weight | Approx. Weight |
|--|-----------|------------------------------------|-----------------------------|--------------------------|----------------|
| No.×mm ² | | mm | mm | kg/km | kg/km |
| 1 x 0.75 | 18(24/32) | 0.6 | 2.6 | 7.2 | 16 |