




# Caledonian

Industrial Cables (German Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## H05RN-F

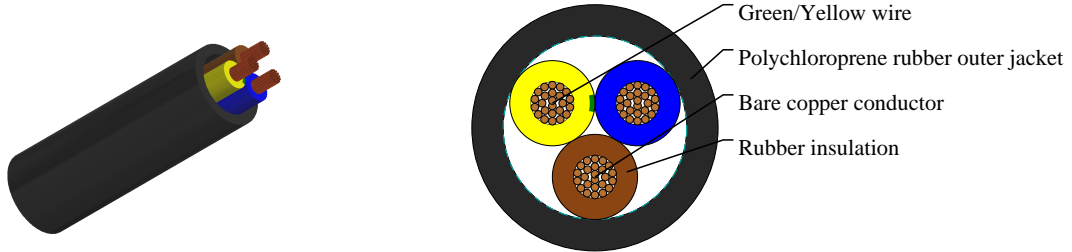

## APPLICATIONS

These cables are flexible, mainly recommended for use in electrical equipment under low stress in dry, damp and wet areas in indoor or outdoor environments. Commonly used for connection of electrical appliances when exposed to low mechanical strain in household, offices and for light utilities. Anywhere where there is minimal physical damage. Also suitable for fixed installation in furniture, decorative coverings, wall partitions and pre-fabricated building parts. Max operating voltage in single or three phase system is U<sub>o</sub>/U 318/550 volts. In a direct current system max operating voltage is U<sub>o</sub>/U 413/825 volts. They are ozone resistant, oil & fat resistant

## STANDARDS

HD 22.4 S3

VDE-0282 Part-4

IEC 60245-4

ROHS compliant

## VOLTAGE RATING

300/500V

## CABLE CONSTRUCTION

- Fine bare copper strands
- Strands to VDE-0295 Class-5, IEC 60228 Class-5
- Rubber core insulation EI4 to VDE-0282 Part-1
- Green-yellow grounding, 3 conductors and above
- Polychloroprene rubber (neoprene) jacket EM2

## COLOUR CODE

Insulation Colour Code

Colour coded to VDE 0293-308

3 cores (G) - Green-Yellow + Brown + Blue

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Flexing bending radius: 7.5 x Ø



# Caledonian

Industrial Cables (German Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

- Fixed bending radius:  $4.0 \times \varnothing$
- Temperature Range:  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$
- Short circuit temperature:  $+200^{\circ}\text{C}$
- Flame retardant: IEC 60332.1
- Insulation resistance:  $20\text{ M}\Omega \times \text{km}$

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	AWG Size	Nominal Insulation Thickness	Nominal Sheath Thickness	Overall Diameter (min.)	Overall Diameter (max.)	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	mm	mm	kg/km	kg/km
3 x 0.75	18(24/32)	0.6	0.9	6.2	8.1	21.6	95