





Caledonian

Industrial Cables (German Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

H07V2-U

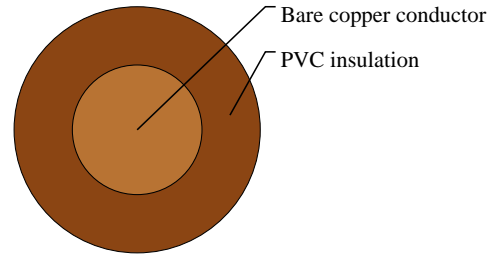

APPLICATIONS

These cables are for fixed protected installation inside appliances and in, or on, lighting fittings. Suitable for installation in surface mounted or embedded conduits, only for signalling and control circuits. Maximum conductor temperature in normal use 90°C. Not to be used in contact with object higher than 85°C. Not suitable for fixed distribution system.

STANDARDS

HD 21.7 S2

VDE-0281 Part-7

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

- Solid bare copper single wire
- Solid to DIN VDE 0281-3, HD 21.3 S3 and IEC 60227-3
- Special PVC T13 ore insulation

COLOUR CODE

Insulation Colour Code

Colour coded to VDE-0293

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2500V
- Flexing bending radius: 15 x Ø
- Static bending radius: 15 x Ø
- Flexing temperature: -5° C to +70° C
- Static temperature: -30° C to +80° C
- Short circuit temperature: +160° C
- Flame retardant: IEC 60332.1
- Insulation resistance: 10 MΩ x km

DIMENSION AND PARAMETERS



Caledonian

Industrial Cables (German Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

| No. of Cores × Cross- sectional Area | AWG Size | Nominal Insulation Thickness | Approx. Overall Diameter | Nominal Copper Weight | Approx. Weight |
|--|----------|------------------------------------|-----------------------------|--------------------------|----------------|
| No.×mm ² | | mm | mm | kg/km | kg/km |
| 1 x 2.5 | 14 | 0.8 | 3.5 | 24.0 | 33 |