




# Caledonian

Industrial Cables (German Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

LiY / LiYv / LiYv-t

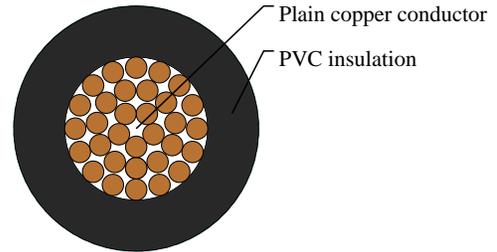

## APPLICATIONS

These PVC insulated stranded hook-up wires are employed in telecommunication systems, toys, sports equipment and general wiring equipment used in electrical engineering to meet stringent demands in terms of high and ultra-high flexibility. They are not permitted to be installed in heavy current applications outside of the equipment.

## STANDARDS

VDE 0812

## VOLTAGE RATING

900V

## CABLE CONSTRUCTION

- Plain copper conductor
- Strands to VDE-0295 Class-5, IEC 60228 Cl-5 and HD383
- Special PVC core insulation, compound Y13 to DIN VDE 0812

## COLOUR CODE

Insulation Colour Code

Core identification to VDE-0293

Single core - Black, Blue, Green/Yellow, Red, Yellow, White, Violet, Brown, Grey, Orange, Pink

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2500 V
- Flexing bending radius: 12.5 x Ø
- Static bending radius: 12.5 x Ø
- Flexing temperature: -5° C to +70° C
- Static temperature: -30° C to +80° C (temporary 105 ° C for LiYv-t)
- Flame retardant: VDE 0472 part 804, test method B, and IEC 60332.1
- Insulation resistance: 10 MΩ x km

## DIMENSION AND PARAMETERS



# Caledonian

Industrial Cables (German Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

No. of Cores × Cross-sectional Area	AWG Size	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No. × mm <sup>2</sup>		mm	kg/km	kg/km
1x1	17(32/32)	2.1	9.6	13