



# Caledonian



Thermocouple Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## Multipair Overall Screen

KX OS 12P1.3

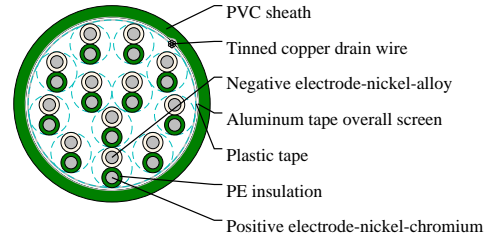

## APPLICATIONS

These cables are used in thermocouple circuits, petrochemical plants, utilities and industrial plants.

## CABLE CONSTRUCTION

Conductor: Solid

Type applicable: KX, EX, JX, TX, NX, KCA, KCB, RCA, RCB, SCA, RCB, BC

Insulation: PVC, PE, XLPE or LSZH thermoplastic material

Wrapping: At least 1 layer of plastic tape

Overall screen: 24  $\mu$ m aluminium / PETP tape over 7-stranded tinned copper drain wire, 0.5mm<sup>2</sup>

Outer sheath: PVC or LSZH thermoplastic material

## COLOUR CODE

According to IEC 60584-3

## PHYSICAL AND THERMAL PROPERTIES

Flame retardancy: IEC 60332-1

Flame propagation: IEC 60332 cat. C

Temperature range: -30°C up to 70°C during operation. -5°C up to 50°C during installation.

## DIMENSION AND PARAMETERS

| No. of Pairs | Conductor Size  | Nominal Insulation Thickness | Nominal Outer Sheath Thickness | Nom. Overall Diameter | Approx. Weight |
|--------------|-----------------|------------------------------|--------------------------------|-----------------------|----------------|
|              | mm <sup>2</sup> | mm                           | mm                             | mm                    | kg/km          |
| 12           | 1.3             | 0.4                          | 1.2                            | 18.3                  | 521            |