



# Caledonian


Aluminium Conductor Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## 12.7/22kV Screened ABC –Aerial Bundled Cables to AS/NZS 3599.1 (AL/XLPE /CWS/HDPE) 3C120

### Light Duty Screen

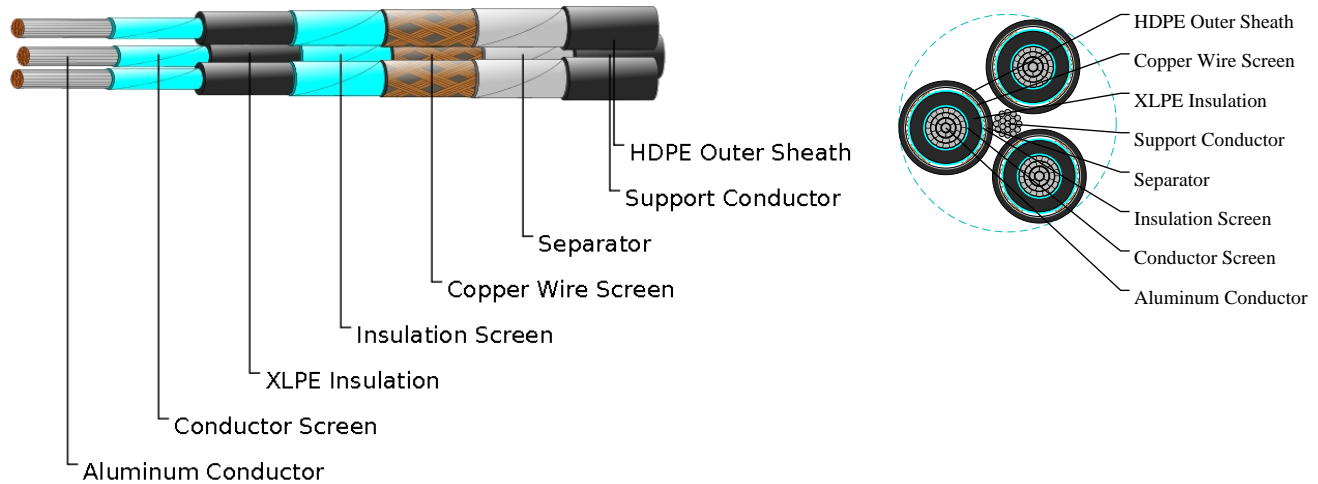

### APPLICATIONS

Three XLPE insulated screened cores are bundled around the galvanized steel wires in a right hand lay.

### STANDARDS

AS/NZS 3599.1

### CABLE CONSTRUCTION

Phase Conductor: Circular compacted stranded H68 aluminium to BS2627.

Conductor Screen: Extruded semi-conductive layer.

Insulation: XLPE.

Insulation Screen: Extruded semi-conductive layer.

Metallic Screen: Copper wire screen.

Separator: Semi-conductive swellable tape.

Outer Sheath: HDPE.

Support Conductor: Galvanized steel wires.

Assembly: Three XLPE insulated screened cores are bundled around the galvanized steel wires in a right hand lay.

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Conductor Diameter	Nominal Insulation Thickness	No. Diameter of Screened Wires	Nominal Sheath Thickness	Approx. Overall Diameter	Cable Weight	Continuous Current Rating (Still air)	Continuous Current Rating (1m/ s wind)	Continuous Current Rating (2m/ s wind)
No.×mm <sup>2</sup>	mm	mm	no x mm	mm	mm	kg/km	A	A	A



Caledonian

Aluminium Conductor Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

3x120	12.8	5.5	25/0.85	2	79.2	3810	205	300	350
-------	------	-----	---------	---	------	------	-----	-----	-----