




# Caledonian

Bus Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## Profibus L2 Drag Chain (Track) 1P0.64 mm

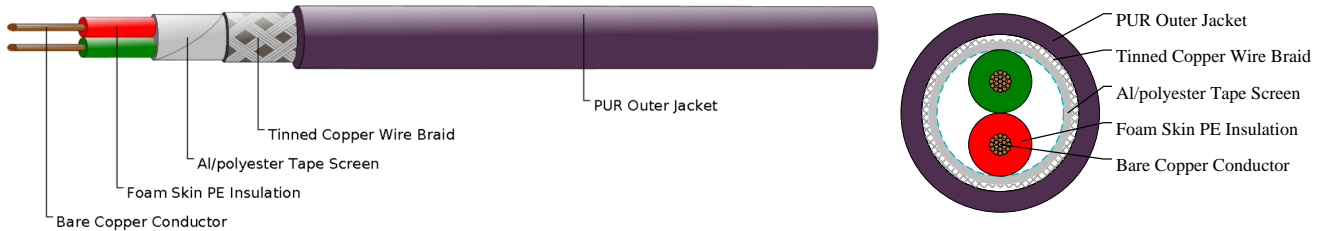

### APPLICATIONS

This system cable is used to interconnect L2-BUS components. This cable is an economical solution for the cell and field area. For the information exchange between different automation systems as well as for communication with the connected decentralized field units, serial field bus systems are used. The above mentioned types are suitable for drag chains (stranded).

### CABLE CONSTRUCTION

- Conductor: Bare copper conductor, AWG 24/19
- Insulation: Foam skin PE
- Stranding Element: 2 conductors + 2 fillers stranded together
- Shielding: Polyester foil, aluminum-lined
- Total Shielding: Tinned copper wire braid
- Outer Jacket: PUR

### COLOUR CODE

- Insulation Colors: Red, Green
- Outer Jacket Color: Violet

### PHYSICAL AND THERMAL PROPERTIES

- Characteristic Impedance@3-20Hz:  $150 \Omega \pm 10 \Omega$
- Conductor Resistance: 82 Ohm/km max
- Insulation Resistance: 1.00 GOhm x km min
- Mutual Capacitance@1 KHz: 30.0 nF/km nom
- Working Voltage Max: 250 V
- Test Voltage: 1.5 KV
- Min. Bending Radius (Laying): 7.5 x OD mm
- Operating Temp. Range, min: -40 °C
- Operating Temp. Range, max: +70 °C

### DIMENSION AND PARAMETERS

Cable Construction	Approx. Overall Diameter	Approx. Weight
	mm	kg/km



Caledonian

Bus Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

1x2x0.64 mm (stranded)	8±0.4	65
------------------------	-------	----