Caledonian

Bus Cables

www.caledonian-cables.com marketing@caledonian-cables.com

ProfiNet Type A 2P0.64 mm

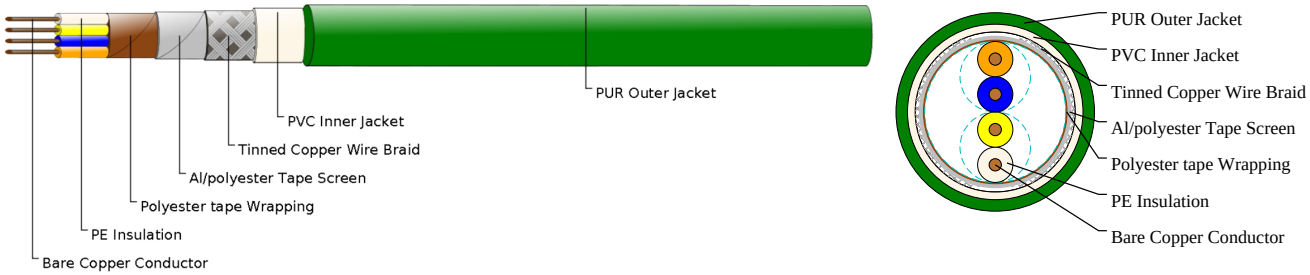

APPLICATIONS

Industrial Ethernet ProfiNet cables are designed to provide reliable network communications in the demanding Industrial and Process Control environment where difficult EMC conditions are pervasive.Conforming to the EIA/TIA-568 standard, These cables support halfduplex high speed communications.It ensures superior transmission properties and can be used even under most severe conditions.

CABLE CONSTRUCTION

Conductor: Bare copper conductor,AWG 22/1
Insulation: PE
Stranding Element:Star quad
Wrapping:Polyester foil over stranded bundle
Shielding:Polyester foil, aluminum-lined
Total Shielding:Tinned copper wire braid
Inner Jacket: PVC
Outer Jacket: PUR

COLOUR CODE

Insulation Colors:White, Yellow, Blue, Orange
Outer Jacket Color:Green

PHYSICAL AND THERMAL PROPERTIES

Characteristic Impedance@1-100Hz:100 Ω ± 15 Ω
Conductor Resistance:62 Ohm/km max
Insulation Resistance:0.5 GOhm x km min
Mutual Capacitance:50.0 nF/km nom
Working Voltage:300 V
Test Voltage:1.5 KV
Min. Bending Radius (Laying):10 x OD mm
Operating Temp.Range,min.:-40 °C
Operating Temp.Range,max.:+70 °C

DIMENSION AND PARAMETERS

Caledonian
Bus Cables
www.caledonian-cables.com marketing@caledonian-cables.com

Cable Construction	Approx. Overall Diameter	Approx. Weight
	mm	kg/km
2x2x0.64 mm	6.5±0.2	64