



Caledonian


Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Mininature Coaxial Cables

0.81 mm Mini-Coax

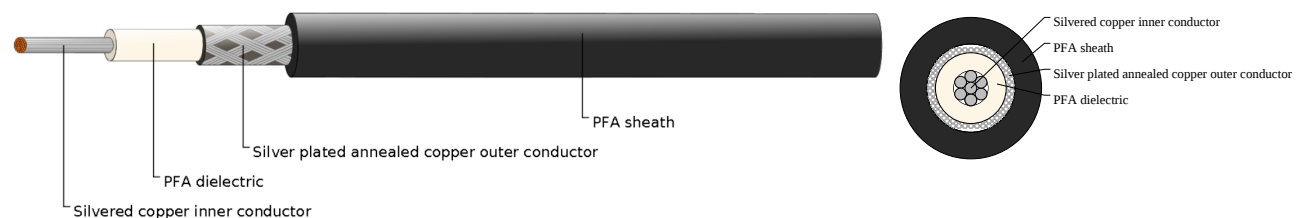

Construction

Inner conductor	Silver plated copper	7 x 0.05 mm
Dielectric	PFA	Φ0.40 mm
Outer conductor(shield)	Silver plated copper	0.05 mm
Shield coverage	/	95%
Outer sheath	PFA	Φ0.81 mm

Electrical Mechanical Characteristics

Impedance	50±3 Ohm
Nominal capacitance	96 pF/m
Velocity of propagation	70%
Operating temperature range	-55 °C - +180 °C
Test/Operatig Voltage(max)	1000V

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
1000	320	97.5
2000	400	121.9
3000	580	176.8
4000	650	198.1
5000	740	225.6
6000	940	286.5