



Caledonian


Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

M17/RG Coaxial-Cable MIL-C-17F 50Ohm

M17/155-RG 58 (RG 58 C/U)

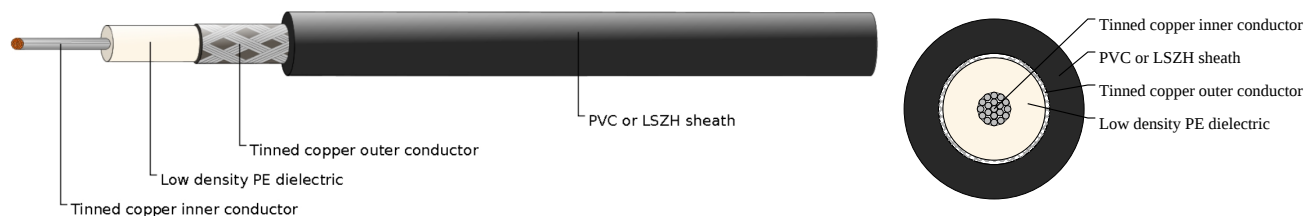

Construction

Inner conductor	Tinned copper	19 x 0.18 mm
Dielectric	Low density PE	$\Phi 2.95 \pm 0.10$ mm
Outer conductor	Tinned copper	112 x 0.13 mm
Shield coverage	/	95%
Sheath	PVC or LSZH	$\Phi 5.00 \pm 0.10$ mm

Electrical Mechanical Characteristics

Impedance	50 $\pm$ 3 Ohm
Nominal capacitance	100 pF/m
Velocity of propagation	66%
Insulation resistance	>2000 Mohm.Km
Inner conductor resistance	37.5 Ohm/Km
Outer conductor resistance	16.5 Ohm/Km
Operating temperature range	-30 °C - +70 °C
Test/Operatig Voltage(max)	5KV/2.5KV
Copper Weight	18.7 Kg/Km
Cable weight (approx.)	39.9 Kg/Km
Screening effectiveness	100-900 MHz >55dB

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
50	10.8	3.29
100	16	4.88
200	24	7.32
400	37.7	11.49
500	41.3	12.59
600	49.7	15.15



Caledonian

Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

860	64.2	19.57
1000	70	21.34

Return Loss

30-300 MHz	>27dB
300-600 MHz	>23dB
600-900 MHz	>22dB