



Caledonian


Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

M17/RG Coaxial-Cable MIL-C-17F 75Ohm

RG 59 BX

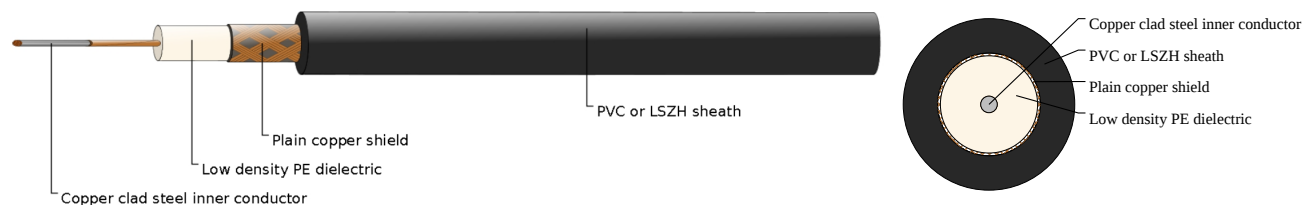

Construction

Inner conductor	Copper clad steel(CCS)	0.58 mm
Dielectric	Low density PE	$\Phi 3.70 \pm 0.10$ mm
Outer conductor(shield)	Plain copper	180 x 0.10 mm
Shield coverage	/	94%
Outer sheath	PVC or LSZH	$\Phi 6.2 \pm 0.10$ mm

Electrical Mechanical Characteristics

Impedance	75 $\pm$ 5 Ohm
Nominal capacitance	67 pF/m
Velocity of propagation	66%
Insulation resistance	>2000 Mohm.Km
Inner conductor resistance	158 Ohm/Km
Outer conductor resistance	11 Ohm/Km
Operating temperature range	-30 °C - +70 °C
Copper weight	15.5 Kg/Km
Cable weight (approx.)	50.9 Kg/Km
Screening effectiveness	>55 dB

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
50	7.4	2.26
100	10.7	3.26
200	15.7	4.79
400	22.7	6.92
500	25.7	7.84
600	28.7	8.75
860	34.8	10.61



Caledonian

Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

1000	38.1	11.62
------	------	-------

Return Loss

30-300 MHz	>31dB
300-600 MHz	>28dB
600-900 MHz	>24dB