



Caledonian


Coaxial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

Semi-rigid Coaxial Cables

SR034

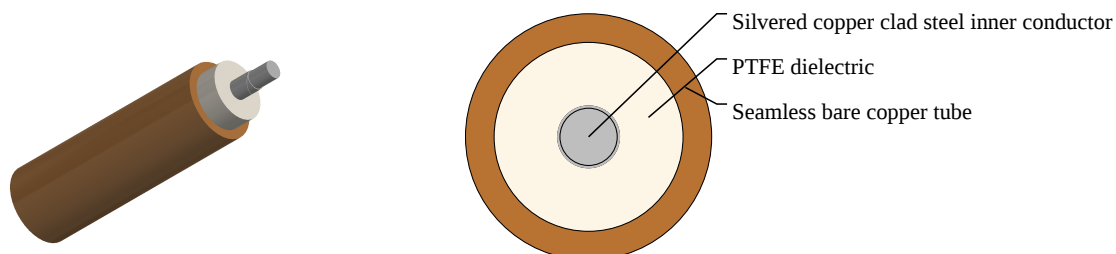

Construction

Inner conductor	Silver plated copper clad steel(SCCS)	$\Phi 0.20$ mm
Dielectric	PTFE	$\Phi 0.66 \pm 0.1$ mm
Outer conductor(type1)	Seamless bare copper tube	$\Phi 0.86 \pm 0.1$ mm
Outer conductor(type2)	Seamless copper tube, tin plated(TP)	$\Phi 0.86 \pm 0.1$ mm
Outer conductor(type3)	Seamless copper tube, silver plated(SP)	$\Phi 0.86 \pm 0.1$ mm

Electrical Mechanical Characteristics

Impedance	50 ± 3 Ohm
Nominal capacitance	95 pF/m
Operating temperature range	$-55^{\circ}\text{C} - +125^{\circ}\text{C}$
Outer conductor integrity temperature	175°C
Min.bending radius	3 mm

Attenuation

Frequency (MHz)	Attenuation (dB/100 m)	Attenuation (dB/100 ft)
500	112	34.1
1000	159	48.5
5000	362	110.3
10000	520	158.5
20000	752	229.2