



Caledonian



IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

TI/TU (MTX400) 0.6/1 kV XLPE Insulated, LSOH (SHF1) Sheathed Flame Retardant Power & Control Cables (4 Cores)

MTX400-1RZ1-R-4C16(4G16)

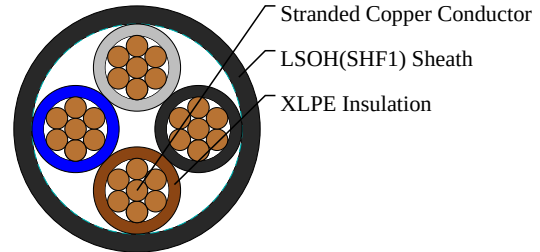

APPLICATIONS

These unarmoured power & control cables are used on board of ships in all locations for fixed installations not subject to mechanical risk complying with IEC standards 60092-352. These cables are flame retardant, low smoke & halogen free.

STANDARDS

IEC 60092-350/353/360

IEC 60332-1

IEC 60332-3-22

IEC 60754-1/2

IEC 61034

CABLE CONSTRUCTION

Conductors: Class 2 stranded copper conductor, round or sector shaped. Class 5 stranded conductors can be offered upon request.

Insulation: XLPE.

Filler (optional): Halogen free filling compound

Outer Sheath: LSOH (SHF1). SHF2 can be offered upon request.

COLOUR CODE

Four cores: Blue, Brown, Black, Grey.

With yellow/green (optional)4G: Yellow/green, Brown, Black, Grey

PHYSICAL AND THERMAL PROPERTIES

Bending Radius for Fixed Installations: $6 \times OD$ ($OD > 25mm$); $4 \times OD$ ($OD \leq 25mm$)

Temperature Range: $-30^{\circ}C \sim +80^{\circ}C$

DIMENSION AND PARAMETERS

Caledonian Cable Code	No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
-----------------------	--	------------------------------	--------------------------	-----------------------	----------------



Caledonian

IEC60092 Offshore & Marine Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

	No.×mm ²	mm	mm	mm	kg/km
MTX400-1RZ1- R-4C16(4G16)	4×(G)16	0.9	1.4	19.5	740