





# Caledonian

Industrial Cables (UL Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

**EPR/Copper Tape Shield with Overall LSZH Jacket Medium-Voltage Power, Shielded, 15KV, UL Type MV-105 133% Ins.Level, 220 Mils, Three Conductor 3C2/0AWG**

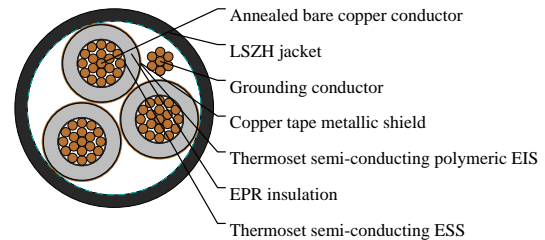

## APPLICATIONS

These cables are suited for use in a broad range of commercial, industrial and utility applications, where reliability is the major concern, space is limited and ease of installation is critical. Besides, they are installed in wet or dry locations accordance with NEC. Also in aerial, direct burial, conduit, open tray and underground duct installations.

## STANDARDS

National Electric Code (NEC)

ICEA S-93-639/NEMA WC74

UL 1072

ICEA S-97-682

AEIC CS8

ICEA T-33-655

UL 1685 (70,000 BTU/hr)

Optional Flame Tests:

IEEE 1202 (70,000 BTU/hr)/CSA FT4

ICEA T-29-520 (210,000 BTU/hr)

## VOLTAGE RATING

15KV

## CABLE CONSTRUCTION

Conductor: Annealed bare copper Class B strand.

Extruded Strand Shield (ESS): Extruded thermoset semi-conducting stress-control layer over conductor.

Insulation: Ethylene Propylene Rubber (EPR) insulation, colored to contrast with the black conducting shield layers.

Extruded Insulation Shield (EIS): Thermoset semi-conducting polymeric layer free stripping from insulation.

Metallic Shield: 5 mil annealed copper tape with an overlap of 25%.

Grounding Conductor: 1 bare grounding conductor may be in contact with metallic shielding tape.

Overall Jacket: Flame-retardant, moisture- and sunlight-resistant, Low-Smoke, Zero-Halogen Polyolefin (LSZH).

## DIMENSION AND PARAMETERS



# Caledonian

Industrial Cables (UL Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

AWG Size	Conduct Diameter in	Conduct Diameter mm	Nominal Diameter over Insulation (min.) in	Nominal Diameter over Insulation (min.) mm	Nominal Diameter over Insulation (max.) in	Nominal Diameter over Insulation (max.) mm	Ground Wire AWG	Nominal Jacket Thickness in	Nominal Jacket Thickness mm	Approx Overall Diameter in	Approx Overall Diameter mm	Approx Weight kg/ km	Approx Weight LBS/ MFT	Impact In Air	Impact GND.	Impact Tray
2/0	0.38	9.65	0.82	20.83	0.905	22.99	4	0.11	2.79	2.3	58.42	4707	3163	245	235	275