




# Caledonian

Industrial Cables (UL Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

**EPR/Copper Tape Shield with Overall LSZH Jacket Medium-Voltage Power, Shielded, 15KV, UL Type MV-105 133% Ins.Level, 220 Mils, Three Conductor 3C2AWG**

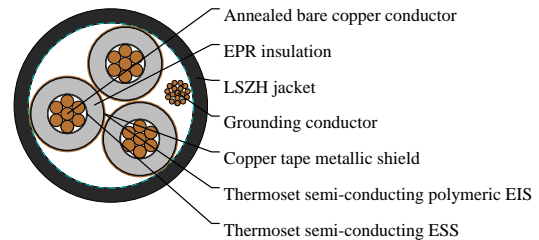

## APPLICATIONS

These cables are suited for use in a broad range of commercial, industrial and utility applications, where reliability is the major concern, space is limited and ease of installation is critical. Besides, they are installed in wet or dry locations accordance with NEC. Also in aerial, direct burial, conduit, open tray and underground duct installations.

## STANDARDS

National Electric Code (NEC)

ICEA S-93-639/NEMA WC74

UL 1072

ICEA S-97-682

AEIC CS8

ICEA T-33-655

UL 1685 (70,000 BTU/hr)

Optional Flame Tests:

IEEE 1202 (70,000 BTU/hr)/CSA FT4

ICEA T-29-520 (210,000 BTU/hr)

## VOLTAGE RATING

15KV

## CABLE CONSTRUCTION

Conductor: Annealed bare copper Class B strand.

Extruded Strand Shield (ESS): Extruded thermoset semi-conducting stress-control layer over conductor.

Insulation: Ethylene Propylene Rubber (EPR) insulation, colored to contrast with the black conducting shield layers.

Extruded Insulation Shield (EIS): Thermoset semi-conducting polymeric layer free stripping from insulation.

Metallic Shield: 5 mil annealed copper tape with an overlap of 25%.

Grounding Conductor: 1 bare grounding conductor may be in contact with metallic shielding tape.

Overall Jacket: Flame-retardant, moisture- and sunlight-resistant, Low-Smoke, Zero-Halogen Polyolefin (LSZH).

## DIMENSION AND PARAMETERS



# Caledonian

Industrial Cables (UL Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

AWG Size	Conductor Diameter	Conductor Diameter	Nominal Diameter over Insulation (min.)	Nominal Diameter over Insulation (min.)	Nominal Diameter over Insulation (max.)	Nominal Diameter over Insulation (max.)	Ground Wire	Nominal Jacket Thickness	Nominal Jacket Thickness	Approx Overall Diameter	Approx Overall Diameter	Approx Weight	Approx Weight	Impact In Air	Impact GND.	Impact Tray
	in	mm	in	mm	in	mm	AWG	in	mm	in	mm	kg/ km	LBS/ MFT			
2	0.27	6.86	0.71	18.03	0.8	20.32	6	0.11	2.79	2.04	51.82	3313	2226	165	160	185