




# Caledonian

Industrial Cables (UL Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

EPR/Copper Wire Shield/CPE, Medium-Voltage Power, Shielded 25KV and 35KV, UL Type MV-105, 133% / 100% Ins. Levels, 345 Mils 1C3/0AWG

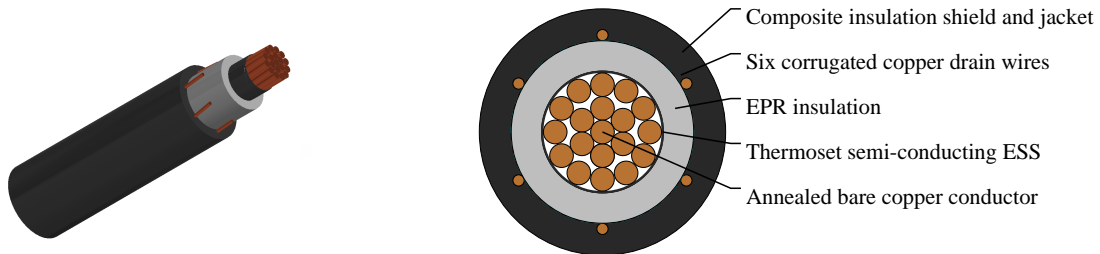

## APPLICATIONS

These cables are suitable for use in wet or dry locations when installed in accordance with NEC, use in aerial, conduit, open tray and underground duct installations and use in direct burial if installed in a system with a ground conductor that is in close proximity, and conforms with NEC 250.4 (A) (5). Besides, they are installed in a broad range of commercial, industrial and utility projects such as pulp and paper mills, petrochemical plants, steel mills, textile mills, water and sewage treatment facilities, environmental protection systems, railroads, mines and fossil fuel utility generating stations.

## STANDARDS

National Electric Code (NEC)

ICEA S-93-639/NEMA WC74

UL 1072

ICEA S-97-682

AEIC CS8

Meets EPA 40 CFR, Part 261 for leachable lead content per TCLP method

UL 1685 (Sizes 1/0 AWG and larger) UL Flame Exposure Test

IEEE 1202 (70,000 BTU/hr)/CSA FT4

Optional Flame Tests: ICEA T-29-520 (210,000 BTU/hr)

## VOLTAGE RATING

25KV\_35KV

## CABLE CONSTRUCTION

Conductor: Annealed bare copper Class B strand.

Extruded Strand Shield (ESS): Extruded thermoset semi-conducting stress-control layer over conductor.

Insulation: Ethylene Propylene Rubber (EPR) insulation colored to contrast with black conducting shield layers.

Composite Insulation Shield and Jacket: Six corrugated copper drain wires embedded in composite layers of semi-conducting thermoset copolymer and semi-conducting black flame-retardant Chlorinated Polyethylene (CPE).

## DIMENSION AND PARAMETERS



# Caledonian

Industrial Cables (UL Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

AWG Size	Conductor Diameter	Conductor Diameter	Nominal Diameter over Insulation (min.)	Nominal Diameter over Insulation (min.)	Nominal Diameter over Insulation (max.)	Nominal Diameter over Insulation (max.)	Drain Wire Size	Nominal Jacket Thickness	Nominal Jacket Thickness	Approx Overall Diameter	Approx Overall Diameter	Approx Weight	Approx Weight	Impact In Air	Impact GND.	Impact Tray
	in	mm	in	mm	in	mm	AWG	in	mm	in	mm	kg/ km	LBS/ MFT			
3/0	0.43	10.92	1.105	28.07	1.205	30.61	17	0.08	2.03	1.41	35.81	1949	1310	290	275	380