





Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

218Y to BS 6500(New BS EN 50525-2-11)

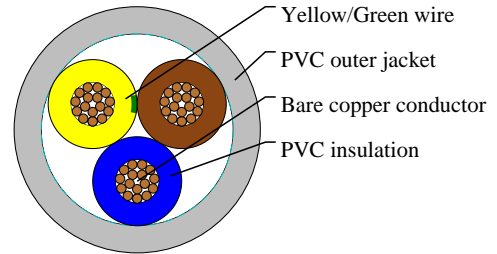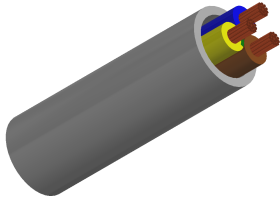

APPLICATIONS

These cable types are especially suited for use on small appliances with low mechanical stress and for connection for light household appliances, e.g. kitchen utensils, desk lamps, floor lamps, vacuum cleaners, office machines, radios, etc. As far as these cables are admitted to the relevant specifications of the equipment, They are not permitted for use with cooking or heating apparatus. 218Y is equivalent to harmonized code H03VV-F.

VOLTAGE RATING

300/300V

CABLE CONSTRUCTION

- Bare copper fine wire conductor
- Stranding to BS 6360 CL-5 or IEC 60228 CL-5
- PVC core insulation TI2 to BS 7655
- Green/Yellow grounding (3 conductors and above)
- PVC outer jacket TM2 to BS 7655

COLOUR CODE

3 Cores: Green/Yellow, Blue, Brown

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Flexing bending radius: 7.5xOverall diameter
- Static bending radius: 4xOverall diameter
- Flexing temperature: -5° C to +70° C
- Static temperature: -40° C to +70° C
- Short circuit temperature: +160° C
- Flame retardant: IEC 60332.1
- Insulation resistance: 20 MΩxkm

DIMENSION AND PARAMETERS



Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores × Cross- sectional Area	AWG Size	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Nominal Copper Weight	Approx. Weight
No.×mm ²		mm	mm	mm	kg/km	kg/km
3x0.5	20(16/32)	0.5	0.6	5.4	14.4	45