





Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

318TQ to BS 6500(New BS EN 50525-2-21)

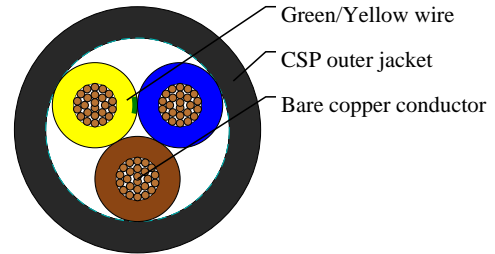

APPLICATIONS

These cables can be used either in dry, humid or wet places or in contact with oil or grease, in weather conditions and under weak mechanical stress, they are suitable for power supply to small appliances in industrial plants, machine shops, heating plates, portable lamps, farming equipment etc. They are also suitable for caravans and camping equipment. 318TQ is equivalent to harmonized code H05BN4-F.

VOLTAGE RATING

300/500V

CABLE CONSTRUCTION

- Fine bare copper strands
- Stranding to BS 6360 CL-5 or IEC 60228 CL-5
- EPR(Ethylene Propylene Rubber) rubber EI7 insulation
- CSP(Chlorosulphonated Polyethylene) outer jacket EM7

COLOUR CODE

3 cores: Green/Yellow, Brown, Blue

PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 2000 volts
- Flexing bending radius: 6xOverall diameter
- Fixed bending radius: 4xOverall diameter
- Temperature Range: -25° C to +90° C
- Maximum short circuit temperature: +250° C
- Flame retardant: IEC 60332.1
- Insulation resistance: 20 MΩxkm

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	AWG Size	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight
No.×mm ²		mm	mm	mm	kg/km



Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

3 x 0.75	18(24/32)	0.6	0.9	7.1	80
----------	-----------	-----	-----	-----	----