





Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

6184B to BS 7211

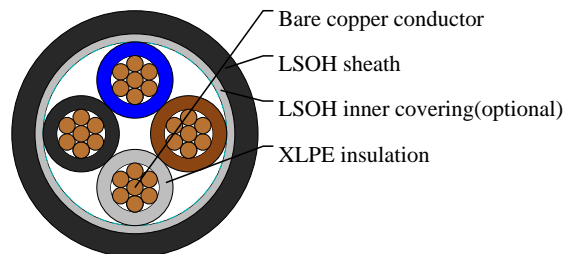

APPLICATIONS

These cables are designed for fixed wiring purposes in domestic and industrial power/lighting applications. They can be installed in trunking or conduit, or may be surface mounted when used for earthing. They are suitable for use in areas (such as public and government buildings) where smoke and toxic fumes may cause a threat to life and equipment. When mechanical protection is required, they can be embedded in concrete.

VOLTAGE RATING

450/750V

CABLE CONSTRUCTION

- Bare copper made of strands conductor
- Stranding to IEC 60228 CL-2
- Thermosetting insulation, type EI 5 or type GP 8 insulation
- For 2 cores and above, the cores shall be laid up together. Centre filler may be used; the laid up cores may be covered by an optional extruded inner covering or separating tape
- LSOH type LTS4 sheath

COLOUR CODE

Insulation Colour Code:

4-core: blue, brown, black and grey

PHYSICAL AND THERMAL PROPERTIES

- Operating temperature: -15° C to +90° C
- Insulation resistance: 10 MΩxkm
- Halogen free acc. to EN 50267-2-1 / IEC 60754-1
- Smoke density acc. to EN 50268-2 / IEC 61034-2
- Corrosivity of gases acc. to EN 50267-2-2, IEC 60754-2
- Flame retardancy acc. to EN 50265-2-1, IEC 60332-1

DIMENSION AND PARAMETERS



Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

| No. of Cores × Cross- sectional Area | AWG Size | Nominal Insulation Thickness | Nominal Sheath Thickness | Nominal Inner Sheath Thickness | Overall Diameter (min.) | Overall Diameter (max.) |
|--|----------|------------------------------------|--------------------------------|--------------------------------------|-------------------------------|-------------------------------|
| No.×mm ² | | mm | mm | mm | mm | mm |
| 4x4 | 12(7/20) | 0.7 | 1.2 | 0.4 | 11.0 | 14.2 |