




# Caledonian

Industrial Cables to British Standard

www.caledonian-cables.com

marketing@caledonian-cables.com

## 658TQ to BS 6883

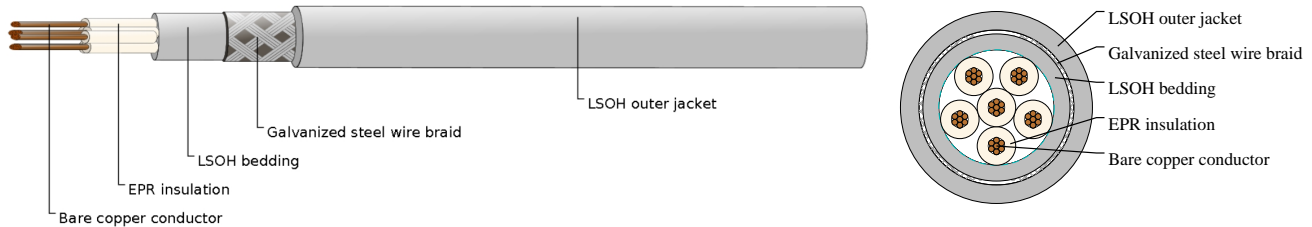

## APPLICATIONS

These cables are designed for use in offshore applications where mechanical protection is not required. Examples of application include fixed wiring in ships and fixed offshore drilling rigs and oil platforms.

## VOLTAGE RATING

600/1000V

## CABLE CONSTRUCTION

- Fine bare copper strands
- Stranding to BS 6360 CL-2 or IEC 60228 CL-2
- EPR(Ethylene Propylene Rubber) rubber insulation to BS 7655
- LSOH bedding
- GSWB (Galvanized steel wire braid) armour
- LSOH(Low Smoke Zero Halogen), type SW4 to BS 7655

## COLOUR CODE

5 cores and above: white insulation with black numerals

## PHYSICAL AND THERMAL PROPERTIES

- Test voltage: 3500 volts
- Minimum bending radius: up to 10mm<sup>2</sup> - 3xOverall diameter  
10mm<sup>2</sup>-25mm<sup>2</sup> - 4xOverall diameter  
Above 25mm<sup>2</sup> - 6xOverall diameter
- Temperature Range: -25° C to +85° C
- Oxygen Index 32%, HCL 5%
- Flame retardant: IEC 60332.3

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	AWG Size	Nominal Insulation Thickness	Nominal Bedding Thickness	Nominal Sheath Thickness	Nominal Armour Wire Diameter	Approx. Overall Diameter	Approx. Weight
No. × mm <sup>2</sup>		mm	mm	mm	mm	mm	kg/km



# Caledonian

Industrial Cables to British Standard

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

6x2.5	14(7/22)	0.8	1.2	1.4	0.3	18.5	545
-------	----------	-----	-----	-----	-----	------	-----