



# Caledonian



## JIS Industrial Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

### JIS C 3342 Cables

VV/VVR 4C2.6

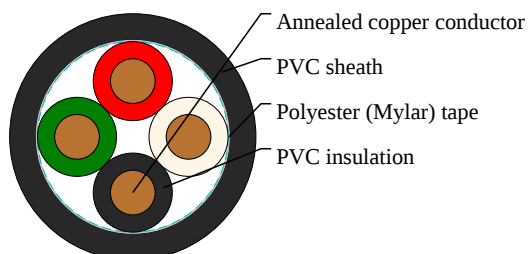

### APPLICATIONS

For exposed fix installation in dry location, surface wiring, concealed wiring in wooden partition or above ceiling, embedded in plaster.

### CABLE CONSTRUCTION

Conductor: Solid, circular stranded annealed copper wires

Insulation: Polyvinyl chloride (PVC)

Filler: Non-hygroscopic material(optional)

Binding tape: Polyester (Mylar) tape (optional)

Sheath: Polyvinyl chloride (PVC), Black color, other colors are upon request

Name Code:

V: Polyvinyl chloride (PVC) V: Polyvinyl chloride (PVC) R : Round type

### COLOUR CODE

4 cores- Black, white, red and green

### PHYSICAL AND THERMAL PROPERTIES

Maximum conductor temperature 70°C

Circuit voltage not exceeding 600 volts

Test voltage 1500 volts

Insulation resistance 50 kOhm / km

### DIMENSION AND PARAMETERS

| No. of Cores | No. and Dia. of Wires | Conductor Diameter | Nominal Insulation Thickness | Nominal Sheath Thickness | Approx. Overall Diameter | Approx. Weight | Max. DC Resistance at 20°C |
|--------------|-----------------------|--------------------|------------------------------|--------------------------|--------------------------|----------------|----------------------------|
|              | no./mm                | mm                 | mm                           | mm                       | mm                       | kg/km          | Ω/km                       |
| 4            | solid                 | 2.6                | 1                            | 1.5                      | 15                       | 365            | 3.42                       |