





Caledonian

Military Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

M81381/11 1C6AWG

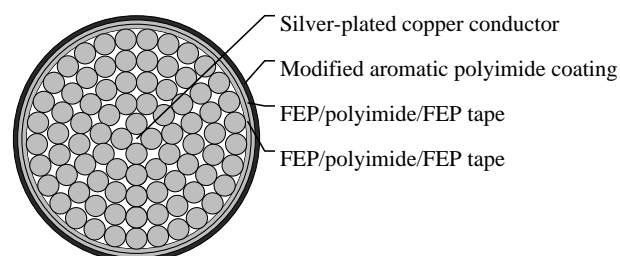

APPLICATIONS

These FEP/polyimide/FEP tape insulated single-core M81381/11 cables are used in aerospace applications and other challenging applications. It is well-suited to applications concerned with smoke emission and overload stability.

VOLTAGE RATING

600V

CABLE CONSTRUCTION

Conductor: Stranded silver-plated copper conductor

Insulation: FEP/polyimide/FEP tape insulation

Insulation Wall Thickness: 0.0084" or 0.017"

Jacket: modified aromatic polyimide coating

COLOUR CODE

MIL-STD-104 (See page 42)

10 basic colors(BLK,BRN,RED,ORN,YEL,GRN,BLU,VIO,GRY,WHT)

PHYSICAL AND THERMAL PROPERTIES

Temperature Range: -55°C to +200°C

DIMENSION AND PARAMETERS

| AWG Size | Conductor Stranding | Diameter of Conductor (min.) | Diameter of Conductor (min.) | Diameter of Conductor (max.) | Diameter of Conductor (max.) | Overall Diameter (min.) | Overall Diameter (min.) | Overall Diameter (max.) | Overall Diameter (max.) | Approx. Weight | Max. Resistance at 20°C |
|----------|---------------------|------------------------------|------------------------------|------------------------------|------------------------------|-------------------------|-------------------------|-------------------------|-------------------------|----------------|-------------------------|
| | | in | mm | in | mm | in | mm | in | mm | LBS/ MFT | OHMS/ MFT |
| 6 | 133/27 | 0.198 | 5.03 | 0.208 | 5.28 | 0.228 | 5.791 | 0.251 | 6.375 | 95.1 | 0.42 |