



# Caledonian



Mining Cables (VDE Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

## Cables for Underground Mining

(N)TSCGECWOEU Medium Voltage Trailing Cable 3×150+3×70/3E+6UEL

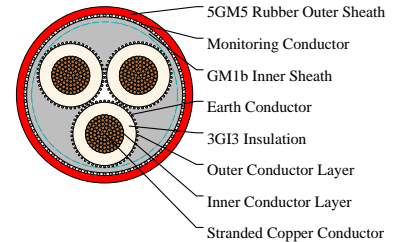

## APPLICATIONS

These cables are used for the connection of electrical equipment, in mines and underground excavations with hazardous environments under particularly high mechanical loads, e.g. high-voltage transformers on power lines in underground mining and tunnelling.

## STANDARDS

VDE 0250 Part 813

## VOLTAGE RATING

6/10kV

## CABLE CONSTRUCTION

Conductors: Flexible stranded copper conductor, class 5 according to DIN VDE 0295.

Inner Conductor Layer: Special rubber compound, conductive.

Insulation: Rubber type 3GI3.

Outer Conductor Layer: Special rubber compound, conductive, easy strippable.

Earth Conductor: Spiral of tinned copper wires.

Inner Sheath: Rubber type GM1b.

Monitoring Shield/Armour: Braided armour of combined copper-steel wires; or wrap of copper and steel wires, copper tape in opposite direction, reinforcing tape.

Outer Sheath: Rubber type 5GM5.

## DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
No.×mm <sup>2</sup>	mm	mm	kg/km
3×150+3×70/3E+6UEL	73	78	9950