



## Caledonian



Mining Cables (VDE Standard)

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

### Cables for Open-cast Mining

NTSCGEWOEU Flexible Medium Voltage Trailing Cable 3×70+2×35/2+1×10ST

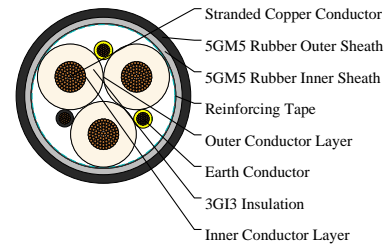

### APPLICATIONS

These cables are used as power supply or connection cables for large material handling machines, e.g. excavators in open-cast mines subject to extremely high mechanical stresses. Particularly suitable for applications in which abrasion and chaffing stresses are to be expected in trailing operation.

### STANDARDS

VDE 0250 Part 813

### VOLTAGE RATING

8.7/15 kV

### CABLE CONSTRUCTION

Conductors: Flexible stranded tinned copper conductor, class 5 according to DIN VDE 0295.

Inner Conductor Layer: Semiconductive layer.

Insulation: Rubber type 3GI3.

Outer Conductor Layer: Semiconductive layer.

Earth Conductor: Split into three in the outer interstices or Individual concentric distributed over core insulating coverings (coding...../3E).

Reinforcing Tape: Extremely tear-resistant reinforcing tape.

Inner Sheath: Rubber type 5GM5, abrasion and tear resistant, oil and ozone resistant.

Outer Sheath: Rubber type 5GM5, abrasion and tear resistant, oil and ozone resistant, inseparably bonded with inner sheath.

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Overall Diameter (min.)	Overall Diameter (max.)	Approx. Weight
No.×mm <sup>2</sup>	mm	mm	kg/km
3×70+2×35/2+1×10ST	64.6	68.6	6820