



Caledonian



Mining Cables (ICEA & CSA Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

Mine Power Feeder Cables

Type MP-GC Three-Conductor Mine Power Feeder Cable, CPE Jacket 25kV 3C1/0AWG

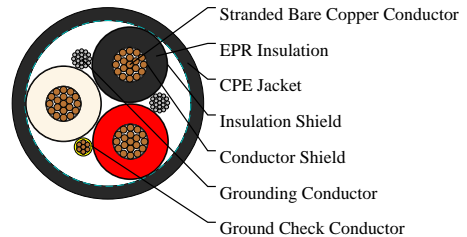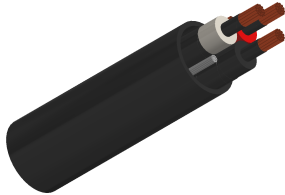

APPLICATIONS

These cables are designed for connections between units of mine distribution systems, suitable for installed in duct, conduit or open air and for direct burial in wet and dry locations.

STANDARDS

ICEA S-75-381/NEMA WC 58

ASTM B-8

CAN/CSA-C22.2 No.96

CABLE CONSTRUCTION

Conductors: Stranded annealed bare copper conductor.

Conductor Shield: Conducting layer.

Insulation: Ethylene Propylene Rubber (EPR).

Insulation Shield: Conducting layer + copper tape.

Ground Check Conductor: Copper conductor with a yellow polypropylene insulation.

Grounding Conductor: Tinned copper conductor.

Jacket: Chlorinated Polyethylene (CPE), black.

Options:

Other jacket materials such as CSP/PCP/NBR/PVC/TPU are available upon request.

COLOUR CODE

Conductor Identification According to ICEA S-75-381:

3 Cores: Black+White+Red

PHYSICAL AND THERMAL PROPERTIES

Minimum Bending Radius: 12×OD

Maximum Conductor Operating Temperature: +90°C

DIMENSION AND PARAMETERS



Caledonian

Mining Cables (ICEA & CSA Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores	AWG Size	No. of Strands	Nominal Insulation Thickness in	Nominal Insulation Thickness mm	Ground Wire AWG	Ground Check Conductor AWG	Nominal Jacket Thickness in	Nominal Jacket Thickness mm	Approx. Overall Diameter in	Approx. Overall Diameter mm	Approx. Weight kg/km	Ampacity amps
3	1/0	19	0.26	6.4	4	8	0.14	3.6	2.45	62.2	5677	218