



Caledonian



Mining Cables (AS_NZS Standard)

www.caledonian-cables.com

marketing@caledonian-cables.com

AS/NZS 1802:2003 Reeling & Trailing Cables

Type 275 1.1/1.1KV 3C16

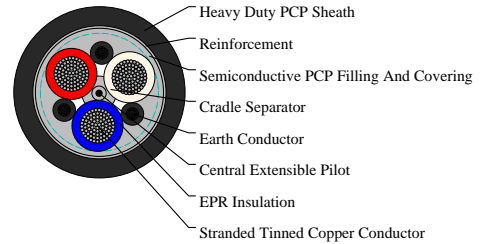

APPLICATIONS

These cables are mainly used as a flexible feeder for shuttle cars and pump. Earth cores designed to reduce instances of wire breaks during reeling while under tension.

STANDARDS

AS/NZS 1802:2003

AS/NZS 1125

AS/NZS 3808

AS/NZS 5000.1

CABLE CONSTRUCTION

3×Conductors: Flexible stranded tinned annealed copper conductor.

Insulation: EPR.

Cradle Separator: Semiconductive PCP.

Overall Core Screen: Semiconductive PCP filling and covering.

3×Interstitial Earth Conductor: Semiconductive PCP covered flexible stranded tinned copper conductor.

1×Central Extensible Pilot: EPR covered flexible stranded tinned copper conductor.

Textile Reinforcement: Open-weave braid reinforcement.

Sheath: Heavy duty PCP sheath. Heavy duty CPE/CSP sheath can be offered upon request.

COLOUR CODE

Rotational sequence of core colours: Red, Black, White, Black, Blue, Black

DIMENSION AND PARAMETERS

Nominal Cross-sectional Area	No./ Nominal Diameter of Strands	Earth Conductor Strand Size	Earth Conductor Thickness of Covering	Pilot Conductor Strand Size	Pilot Conductor Thickness of Covering	Nominal Insulation Thickness	Nominal Sheath Thickness	Nom. Overall Diameter	Approx. Weight
mm ²	no./mm	no./mm	mm	no./mm	mm	mm	mm	mm	kg/km
16	126/0.4	60/0.3	1	24/0.2	0.8	1.6	3.8	30.2	145