




# Caledonian

NEK606 Caledonian Offshore & Marine Cables Telecommunication Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## S112 SFOU(i) 250 V

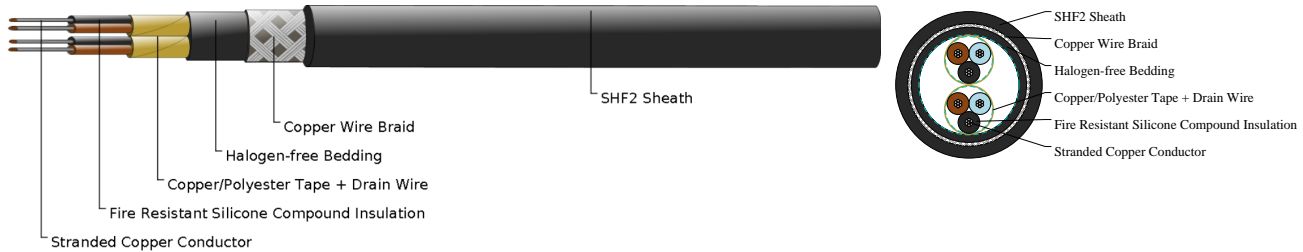

## APPLICATIONS

These cables are fire resistant, flame retardant, low smoke and halogen free, used for emergency instrumentation, communication, control and alarm systems that need to be operational during a 1100°C hydrocarbon fire.

## STANDARDS

IEC 60092-376  
 IEC 60092-360  
 IEC 60332-1  
 IEC 60332-3-22  
 IEC 60754-1,2  
 IEC 61034-1,2  
 NEK 606:2016  
 IEC 60331-21

## VOLTAGE RATING

250V

## CABLE CONSTRUCTION

Conductors: Circular tinned stranded copper wire to IEC 60228 class 2 or class 5.

Insulation: Fire resistant silicone compound.

Twinning: Colour coded cores twisted together.

Individual Screen: Copper backed polyester tape in contact with a stranded tinned copper drain wire.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid.

Outer Sheath: Halogen free thermosetting compound, SHF2.

## MECHANICAL PROPERTIES

Bending Radius: 20×OD (during installation); 12×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

## DIMENSION AND PARAMETERS

Construction No. of elements×No.	Nominal Insulation Thickness	Diameter under Armour	Approx. Overall Diameter	Approx. Weight
----------------------------------	------------------------------	-----------------------	--------------------------	----------------



# Caledonian

NEK606 Caledonian Offshore & Marine Cables Telecommunication Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

of cores in element×Cross section				
mm <sup>2</sup>	mm	mm	mm	kg/km
2×3×0.75	0.9	16.2	21.0	660