




Caledonian

NEK606 Caledonian Offshore & Marine Cables Telecommunication Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

S112 SFOU(i) 250 V

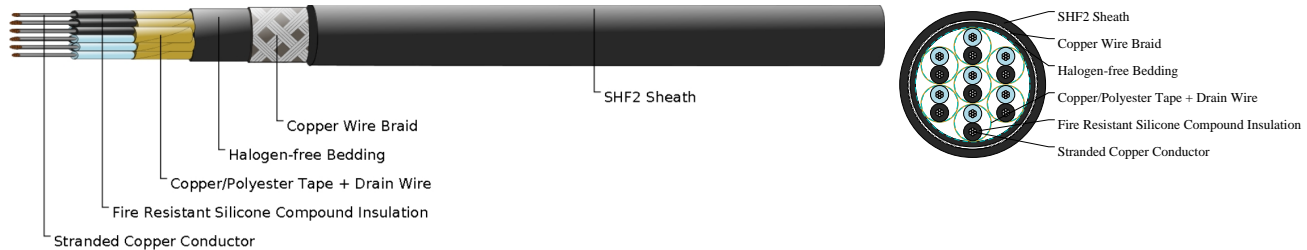

APPLICATIONS

These cables are fire resistant, flame retardant, low smoke and halogen free, used for emergency instrumentation, communication, control and alarm systems that need to be operational during a 1100°C hydrocarbon fire.

STANDARDS

- IEC 60092-376
- IEC 60092-360
- IEC 60332-1
- IEC 60332-3-22
- IEC 60754-1,2
- IEC 61034-1,2
- NEK 606:2016
- IEC 60331-21

VOLTAGE RATING

250V

CABLE CONSTRUCTION

Conductors: Circular tinned stranded copper wire to IEC 60228 class 2 or class 5.

Insulation: Fire resistant silicone compound.

Twinning: Colour coded cores twisted together.

Individual Screen: Copper backed polyester tape in contact with a stranded tinned copper drain wire.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid.

Outer Sheath: Halogen free thermosetting compound, SHF2.

MECHANICAL PROPERTIES

Bending Radius: 20×OD (during installation); 12×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum Resistance @20°C	Mutual Capacitance	Nominal Inductance @ 1KHz
-------------------------	-------------------------	--------------------------	--------------------	---------------------------



Caledonian

NEK606 Caledonian Offshore & Marine Cables Telecommunication Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

mm ²	mm	Ohm/km	nF/km	MH/km
1.5	1.6	12.9	85	0.667

DIMENSION AND PARAMETERS

Construction No. of elements×No. of cores in element×Cross section	Nominal Insulation Thickness	Diameter under Armour	Approx. Overall Diameter	Approx. Weight
mm ²	mm	mm	mm	kg/km
7×2×1.5	1.0	21.6	29.0	1510