




# Caledonian

## NEK606 Caledonian Offshore & Marine Cables Fire Resistant Medium Voltage Power Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

### P122 RFOU / TFOU-FIRE RESISTANT 8.7/15 (12) kV

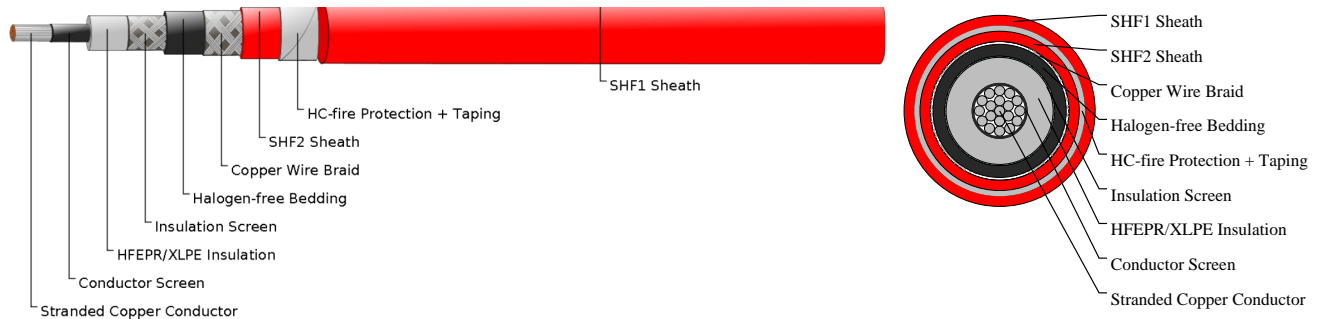

### APPLICATIONS

These cables are fire resistant, flame retardant, low smoke and halogen free, used for emergency control, power and lighting systems that need to be operational during a 1100°C hydrocarbon fire.

### STANDARDS

IEC 60092-354  
IEC 60092-360  
IEC 60331-21  
IEC 60332-1  
IEC 60332-3-22  
IEC 60754-1,2  
IEC 61034-1,2  
NEK 606:2016

### VOLTAGE RATING

8.7/15 (12) kV

### CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper to IEC 60228 class 2 or class 5.

Conductor Screen: Semi conducting material.

Insulation: Halogen-free EPR or XLPE.

Insulation Screen: Semi conducting material and tinned copper wire braid.

Bedding: Halogen free compound.

Armour: Tinned copper wire braid.

Outer Sheath: Halogen free thermosetting compound, SHF2, coloured red.

Optional Fire protection: Extruded thermoplastic fire protection compound.

Optional Taping: Lapped glass fibre tape.

Optional Sheath: Flame retardant halogen-free thermoplastic compound, SHF1, coloured red.

### MECHANICAL PROPERTIES

Bending Radius: 20×OD (during installation); 12×OD (fixed installed)



## Caledonian

NEK606 Caledonian Offshore & Marine Cables Fire Resistant Medium Voltage Power Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

Temperature Range: -20°C ~ +90°C

### DIMENSION AND PARAMETERS

| No. of Cores ×<br>Cross-sectional Area | Nominal Insulation<br>Thickness | Diameter<br>under Armour | Approx. Overall<br>Diameter | Approx. Weight |
|--|---------------------------------|--------------------------|-----------------------------|----------------|
| No. × mm <sup>2</sup>                  | mm                              | mm                       | mm                          | kg/km          |
| 1 × 50                                 | 4.5                             | 35.9                     | 47                          | 2930           |