




# Caledonian

NEK606 Offshore & Marine Cables Fire Resistant Power and Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

## P110 (Formerly P17) BU 0.6/1 kV

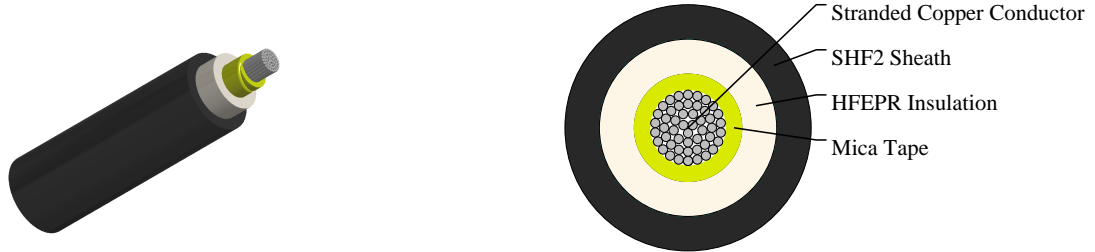

### APPLICATIONS

These cables are flame retardant, low smoke, halogen free and mud resistant, used for control, power and lighting systems.

### STANDARDS

IEC 60092-353  
IEC 60092-351  
IEC 60092-359  
IEC 60331-21  
IEC 60332-1  
IEC 60332-3-22  
IEC 60754-1,2  
IEC 61034-2  
NEK 606:2004

### VOLTAGE RATING

0.6/1KV

### CABLE CONSTRUCTION

Conductors: Tinned annealed stranded copper to IEC 60228 class 2 or class 5.

Insulation: Mica tape + Halogen free EPR.

Outer Sheath: Halogen free thermosetting compound, SHF2, coloured black.

### MECHANICAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

### TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 1 Core	Short Circuit Current 1s
mm <sup>2</sup>	mm	Ohm/km	A	A



## Caledonian

NEK606 Offshore & Marine Cables Fire Resistant Power and Control Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

2.5	2.1	7.56	30	360
-----	-----	------	----	-----

### DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight
No. × mm <sup>2</sup>	mm	mm	mm	kg/km
1 × 2.5	1.0	1.0	6.8	75