





Caledonian

NEK606 Offshore & Marine Cables Fire Resistant Power and Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

P110 (Formerly P17) BU 0.6/1 kV

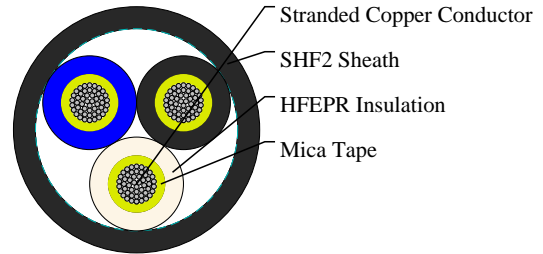

APPLICATIONS

These cables are flame retardant, low smoke, halogen free and mud resistant, used for control, power and lighting systems.

STANDARDS

IEC 60092-353
IEC 60092-351
IEC 60092-359
IEC 60331-21
IEC 60332-1
IEC 60332-3-22
IEC 60754-1,2
IEC 61034-2
NEK 606:2004

VOLTAGE RATING

0.6/1KV

CABLE CONSTRUCTION

Conductors: Tinned annealed stranded copper to IEC 60228 class 2 or class 5.

Insulation: Mica tape + Halogen free EPR.

Outer Sheath: Halogen free thermosetting compound, SHF2, coloured black.

MECHANICAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Continuous Current Rating @45°C 3/4 Core	Short Circuit Current 1s
mm ²	mm	Ohm/km	A	A



Caledonian

NEK606 Offshore & Marine Cables Fire Resistant Power and Control Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

2.5	2.1	7.56	21	360
-----	-----	------	----	-----

DIMENSION AND PARAMETERS

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight
No. × mm ²	mm	mm	mm	kg/km
3 × 2.5	1.0	1.2	11.9	230