





Caledonian

NEK606 Caledonian Offshore & Marine Cables Instrumentation Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

S111 RX / TX 250V

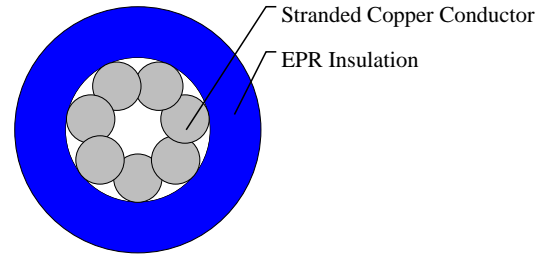

APPLICATIONS

These cables are fire resistant, flame retardant, low smoke and halogen free, used for emergency control, power and lighting systems that need to be operational during a 1100°C hydrocarbon fire.

STANDARDS

IEC 60092-354
IEC 60092-360
IEC 60331-21
IEC 60332-3-22
IEC 60754-1,2
IEC 61034-1,2
NEK 606:2016

VOLTAGE RATING

250V

CABLE CONSTRUCTION

Conductors: Circular tinned annealed stranded copper to IEC 60228 class 2 or class 5.

Insulation: Halogen-free EPR or XLPE. Blue, brown, black or grey. Blue, brown, black or grey.

MECHANICAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum Resistance @20°C	Mutual Capacitance	Nominal Inductance @ 1KHz	Maximum L/R @ 1KHz
mm ²	mm	Ohm/km	nF/km	MH/km	μH/Ω
2.5	2.0	8.02	110	0.629	55

DIMENSION AND PARAMETERS



Caledonian

NEK606 Caledonian Offshore & Marine Cables Instrumentation Cables

www.caledonian-cables.com

marketing@caledonian-cables.com

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Approx. Overall Diameter	Approx. Weight
No. × mm ²	mm	mm	kg/km
1 × 2.5	0.7	3.41	209