




# Caledonian

NEK606 Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

## P111 RU/TU (Formerly P18 RU) 0.6/1kV

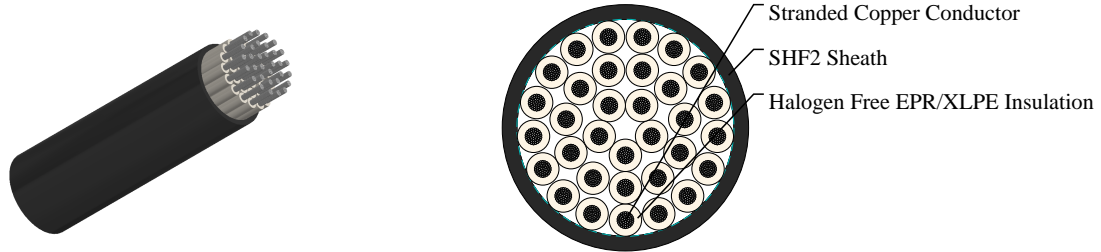

### APPLICATIONS

These cables are flame retardant, low smoke, halogen free and mud resistant, used for control, power and lighting systems.

### STANDARDS

IEC 60092-353  
IEC 60092-360  
IEC 60332-1  
IEC 60332-3-22  
IEC 60754-1,2  
IEC 61034-1,2  
NEK 606:2016

### VOLTAGE RATING

0.6/1KV

### CABLE CONSTRUCTION

Conductors: Tinned annealed stranded copper to IEC 60228 class 2 or class 5.

Insulation: Halogen-free EPR or XLPE.

Outer Sheath: Halogen free thermosetting compound, SHF2, coloured black.

### MECHANICAL PROPERTIES

Bending Radius: 8×OD (during installation); 6×OD (fixed installed)

Temperature Range: -20°C ~ +90°C

### TECHNICAL CHARACTERISTICS

Nom. Cross-Section Area	Nom. Conductor Diameter	Maximum DC Resistance @20°C	Short Circuit Current 1s
mm <sup>2</sup>	mm	Ohm/km	A
2.5	2.1	7.56	360

### DIMENSION AND PARAMETERS



# Caledonian

NEK606 Offshore & Marine Cables

[www.caledonian-cables.com](http://www.caledonian-cables.com)

[marketing@caledonian-cables.com](mailto:marketing@caledonian-cables.com)

No. of Cores × Cross-sectional Area	Nominal Insulation Thickness	Nominal Sheath Thickness	Approx. Overall Diameter	Approx. Weight
No. × mm <sup>2</sup>	mm	mm	mm	kg/km
33 × 2.5	1.0	1.9	32.3	1585